
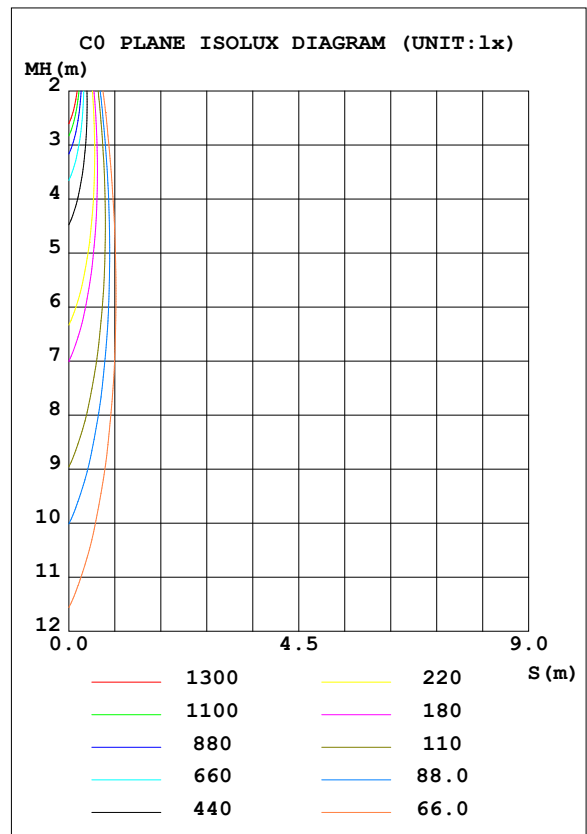


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 37.40 lm/W			
MODEL	CLU701 1002	I _{max} (cd)	9850	S/MH (C0/180)	0.39
NOMINAL POWER (W)	3x10W	LOR (%)	100.0	S/MH (C90/270)	0.37
RATED VOLTAGE (V)	220.0	TOTAL FLUX (lm)	1188.8	η UP, DN (C0-180)	0.2, 26.6
NOMINAL FLUX (lm)	1188.78	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 73.1
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	220.2	η down (%)	99.7	CIBSE SHR MAX	1.00

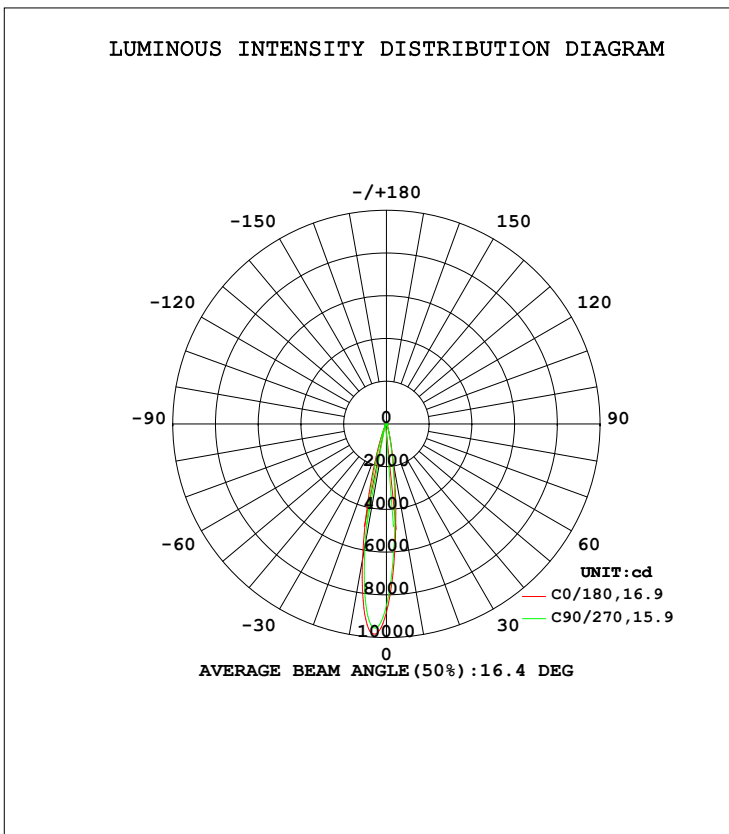

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Xie Bi
 Test Date: 2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 6.810m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum, lamp
10	1862	1644	6432	5750				0- 10	571.3	571.3	48.1,48.1
20	237.8	235.3	927.4	722.7				10- 20	450.9	1022	86,86
30	68.05	69.08	148.1	129.6				20- 30	108.2	1130	95.1,95.1
40	25.25	23.72	45.68	42.35				30- 40	38.11	1168	98.3,98.3
50	2.981	1.307	12.36	11.66				40- 50	14.37	1183	99.5,99.5
60	0.0001	0	0.2036	0.0980				50- 60	1.837	1185	99.7,99.7
70	0	0	0	0				60- 70	0.0092	1185	99.7,99.7
80	0	0	0	0				70- 80	0	1185	99.7,99.7
90	0	0	0	0				80- 90	0	1185	99.7,99.7
100	0	0	0	0				90-100	0	1185	99.7,99.7
110	0	0	0	0				100-110	0	1185	99.7,99.7
120	0	0	0.0122	0				110-120	0.0008	1185	99.7,99.7
130	0.0592	0.0645	0.0454	0.0279				120-130	0.0166	1185	99.7,99.7
140	0.4269	0.3510	0.1169	0.0976				130-140	0.0924	1185	99.7,99.7
150	2.669	2.555	0.4153	0.3485				140-150	0.4265	1185	99.7,99.7
160	6.847	7.543	2.540	2.194				150-160	1.367	1187	99.8,99.8
170	6.132	6.564	5.853	5.851				160-170	1.624	1188	100,100
180	4.825	5.352	4.820	5.355				170-180	0.5423	1189	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

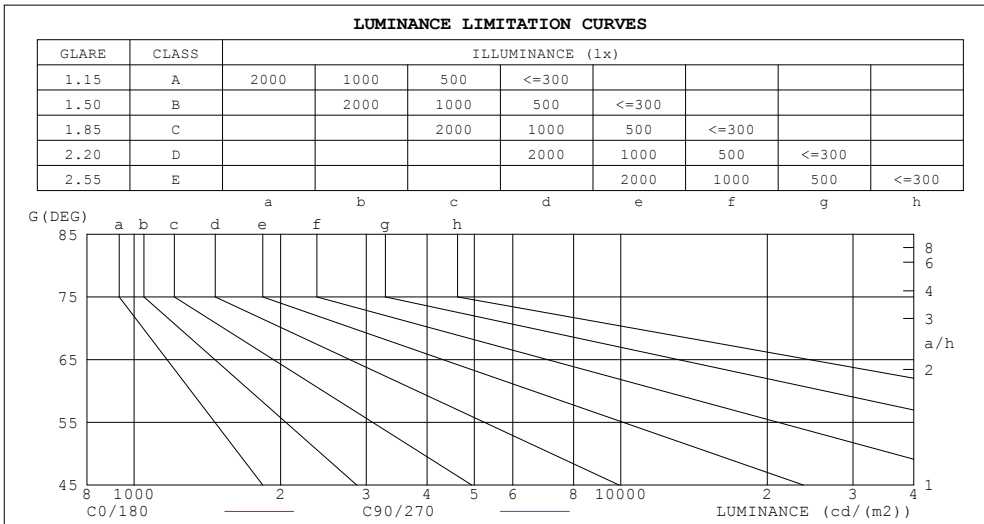

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	0	0
60	0	0
55	14	2
50	134	59
45	474	384


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.12	1.10	1.11	1.10	1.08	1.07	1.06	1.05	1.03	1.03	1.02	1.00	.99	.99	.97
2.0	1.09	1.06	1.03	1.07	1.04	1.02	1.04	1.02	1.00	1.01	.99	.98	.98	.97	.96	.94
3.0	1.05	1.01	.99	1.03	1.00	.98	1.01	.98	.96	.98	.96	.95	.96	.95	.93	.92
4.0	1.01	.97	.95	.97	.94	.94	.98	.95	.93	.96	.94	.92	.94	.93	.91	.90
5.0	.98	.94	.91	.97	.94	.91	.95	.92	.90	.94	.91	.89	.93	.90	.89	.88
6.0	.95	.91	.89	.94	.91	.88	.93	.90	.88	.92	.89	.87	.91	.88	.87	.86
7.0	.93	.89	.86	.92	.88	.86	.91	.88	.86	.90	.87	.85	.89	.87	.85	.84
8.0	.90	.87	.84	.90	.86	.84	.89	.86	.84	.88	.85	.83	.87	.85	.83	.82
9.0	.88	.85	.82	.88	.84	.82	.87	.84	.82	.86	.83	.82	.86	.83	.81	.80
10.0	.86	.83	.80	.86	.83	.80	.85	.82	.80	.85	.82	.80	.84	.82	.80	.79

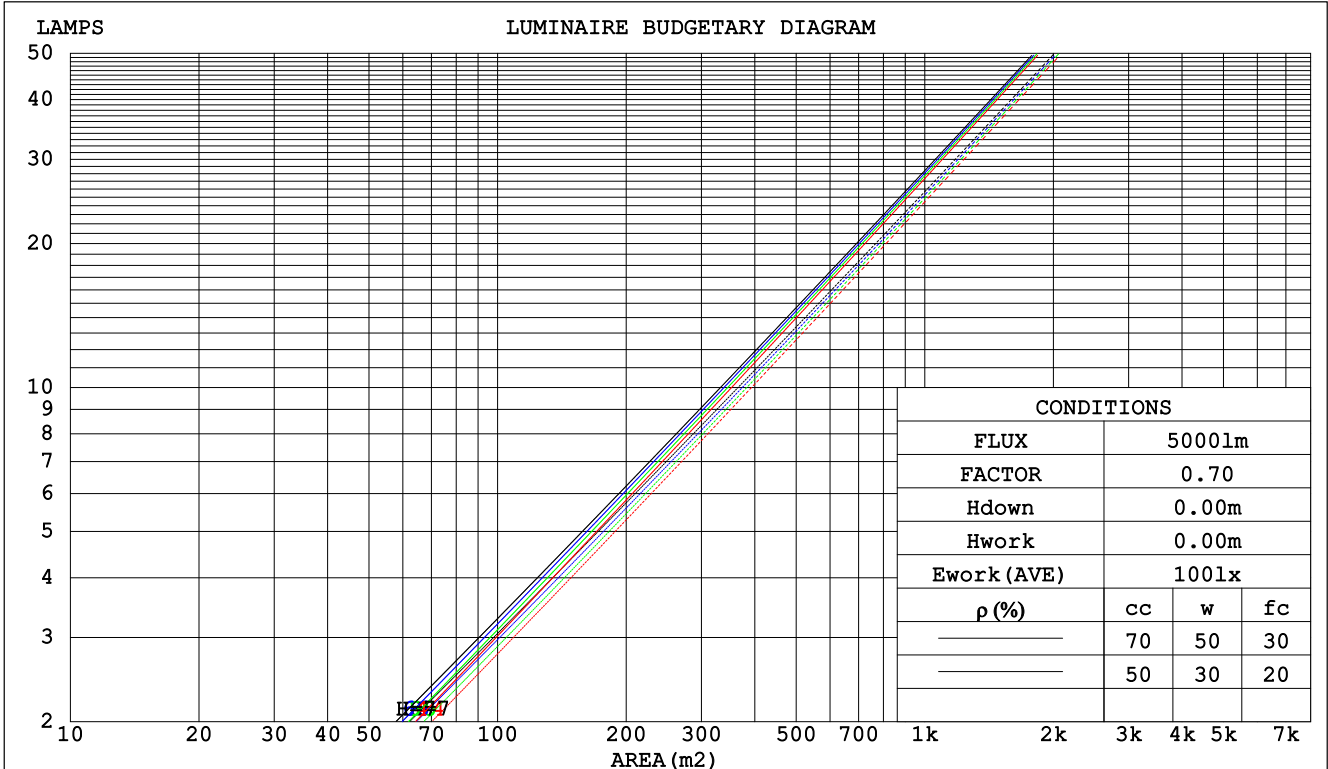

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.127	.072	.023	.120	.069	.022	.108	.062	.020	.096	.056	.018	.086	.050	.016	
2.0	.117	.064	.020	.111	.061	.019	.101	.056	.017	.092	.051	.016	.083	.047	.015	
3.0	.108	.058	.017	.104	.056	.017	.095	.052	.016	.087	.048	.015	.080	.044	.014	
4.0	.101	.052	.015	.097	.051	.015	.090	.048	.014	.083	.045	.013	.077	.042	.013	
5.0	.095	.048	.014	.091	.047	.014	.085	.044	.013	.080	.042	.012	.074	.040	.012	
6.0	.089	.045	.013	.086	.044	.013	.081	.042	.012	.076	.040	.012	.072	.038	.011	
7.0	.084	.042	.012	.082	.041	.012	.077	.039	.011	.073	.037	.011	.069	.036	.011	
8.0	.080	.039	.011	.078	.038	.011	.074	.037	.011	.070	.036	.010	.067	.034	.010	
9.0	.076	.037	.010	.074	.036	.010	.071	.035	.010	.068	.034	.010	.064	.033	.009	
10.0	.073	.035	.010	.071	.034	.010	.068	.033	.009	.065	.032	.009	.062	.031	.009	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.170	.160	.151	.146	.138	.130	.100	.095	.090	.057	.055	.052	.018	.018	.017	
2.0	.152	.135	.122	.130	.117	.105	.089	.081	.073	.051	.047	.043	.016	.015	.014	
3.0	.136	.116	.100	.117	.100	.087	.080	.069	.061	.046	.041	.036	.015	.013	.012	
4.0	.123	.100	.083	.106	.087	.072	.073	.060	.051	.042	.035	.030	.014	.012	.010	
5.0	.112	.088	.070	.096	.076	.061	.066	.053	.043	.038	.031	.026	.012	.010	.008	
6.0	.103	.078	.060	.088	.067	.052	.061	.047	.037	.035	.028	.022	.011	.009	.007	
7.0	.095	.069	.052	.082	.060	.045	.056	.042	.032	.033	.025	.019	.011	.008	.006	
8.0	.088	.062	.045	.076	.054	.039	.052	.038	.028	.031	.022	.017	.010	.007	.005	
9.0	.082	.057	.039	.071	.049	.034	.049	.035	.024	.029	.020	.015	.009	.007	.005	
10.0	.077	.052	.035	.066	.045	.031	.046	.032	.022	.027	.019	.013	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-2.9	-2.3	-2.7	-2.2	-2.0	-3.1	-2.5	-2.9	-2.3	-2.2
3H	-3.0	-2.5	-2.8	-2.3	-2.1	-3.2	-2.7	-3.0	-2.5	-2.3
4H	-3.1	-2.6	-2.8	-2.4	-2.2	-3.3	-2.8	-3.0	-2.6	-2.3
6H	-3.2	-2.7	-2.9	-2.5	-2.2	-3.4	-2.9	-3.1	-2.6	-2.4
8H	-3.2	-2.8	-2.9	-2.5	-2.3	-3.4	-2.9	-3.1	-2.7	-2.4
12H	-3.3	-2.8	-3.0	-2.6	-2.3	-3.5	-3.0	-3.2	-2.7	-2.5
4H 2H	-3.1	-2.6	-2.8	-2.4	-2.2	-3.3	-2.8	-3.0	-2.6	-2.3
3H	-3.3	-2.8	-3.0	-2.6	-2.3	-3.5	-3.0	-3.2	-2.7	-2.5
4H	-3.4	-3.0	-3.0	-2.7	-2.4	-3.6	-3.1	-3.2	-2.8	-2.5
6H	-3.5	-3.1	-3.1	-2.8	-2.4	-3.7	-3.3	-3.3	-3.0	-2.6
8H	-3.5	-3.2	-3.1	-2.8	-2.5	-3.7	-3.4	-3.3	-3.0	-2.6
12H	-3.6	-3.3	-3.2	-2.9	-2.5	-3.8	-3.5	-3.4	-3.1	-2.7
8H 4H	-3.5	-3.2	-3.1	-2.8	-2.5	-3.7	-3.4	-3.3	-3.0	-2.6
6H	-3.7	-3.4	-3.2	-3.0	-2.5	-3.8	-3.5	-3.4	-3.1	-2.7
8H	-3.7	-3.5	-3.3	-3.0	-2.6	-3.9	-3.6	-3.5	-3.2	-2.8
12H	-3.8	-3.6	-3.3	-3.1	-2.6	-4.0	-3.7	-3.5	-3.3	-2.8
12H 4H	-3.6	-3.3	-3.2	-2.9	-2.5	-3.8	-3.5	-3.4	-3.1	-2.7
6H	-3.7	-3.5	-3.3	-3.0	-2.6	-3.9	-3.6	-3.5	-3.2	-2.8
8H	-3.8	-3.6	-3.3	-3.1	-2.6	-4.0	-3.7	-3.5	-3.3	-2.8
Variations with the observer position at spacings:										
S = 1.0H	+ 3.0 / -37.3					+ 3.0 / - 1.\$				
1.5H	+ 5.2 / -26.8					+ 5.4 / -30.6				
2.0H	+ 8.3 / - 1.\$					+ 8.2 / - 1.\$				

CIE Pub.117, 1189 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.6)
 Area: 0.0346 m2

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	85	81	90	85	81	89	84	81	78
0.80	98	92	89	97	92	89	96	91	88	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	107	103	100	106	102	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	114	112	113	112	110	109	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

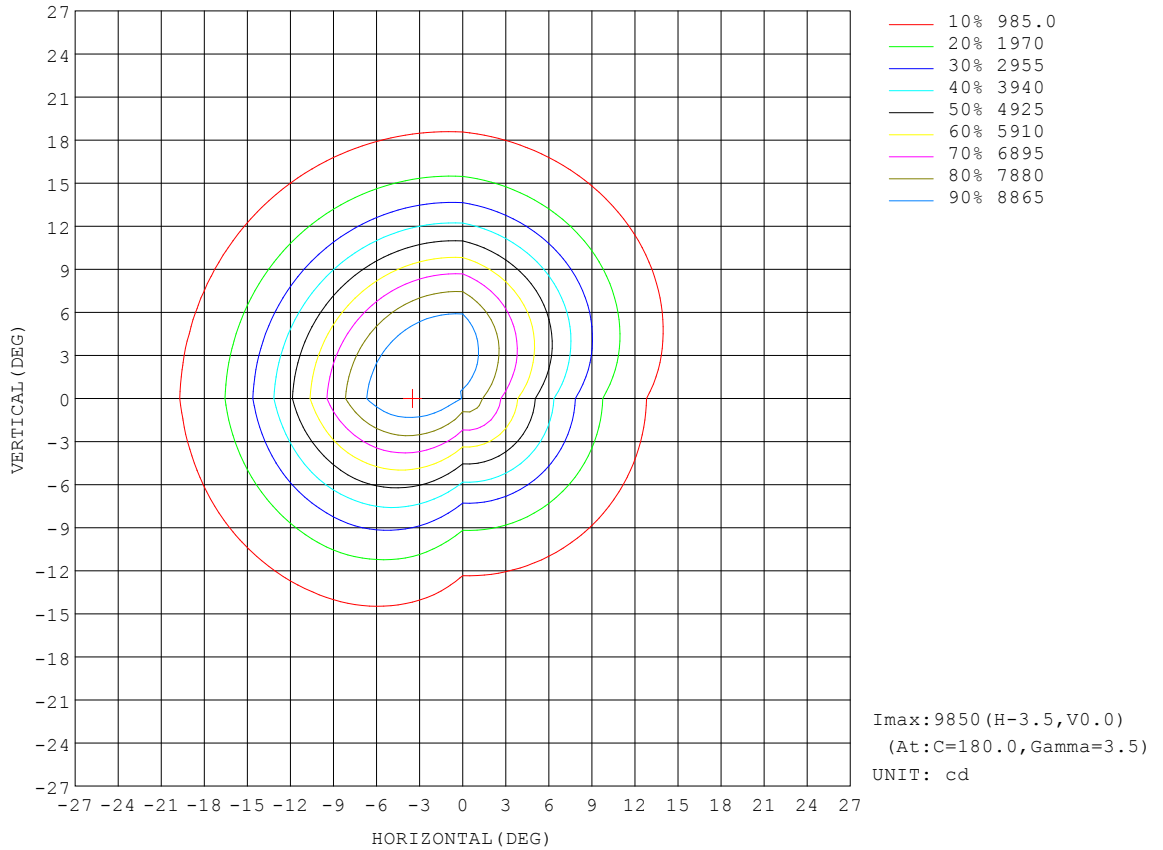


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

AAI Figure

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

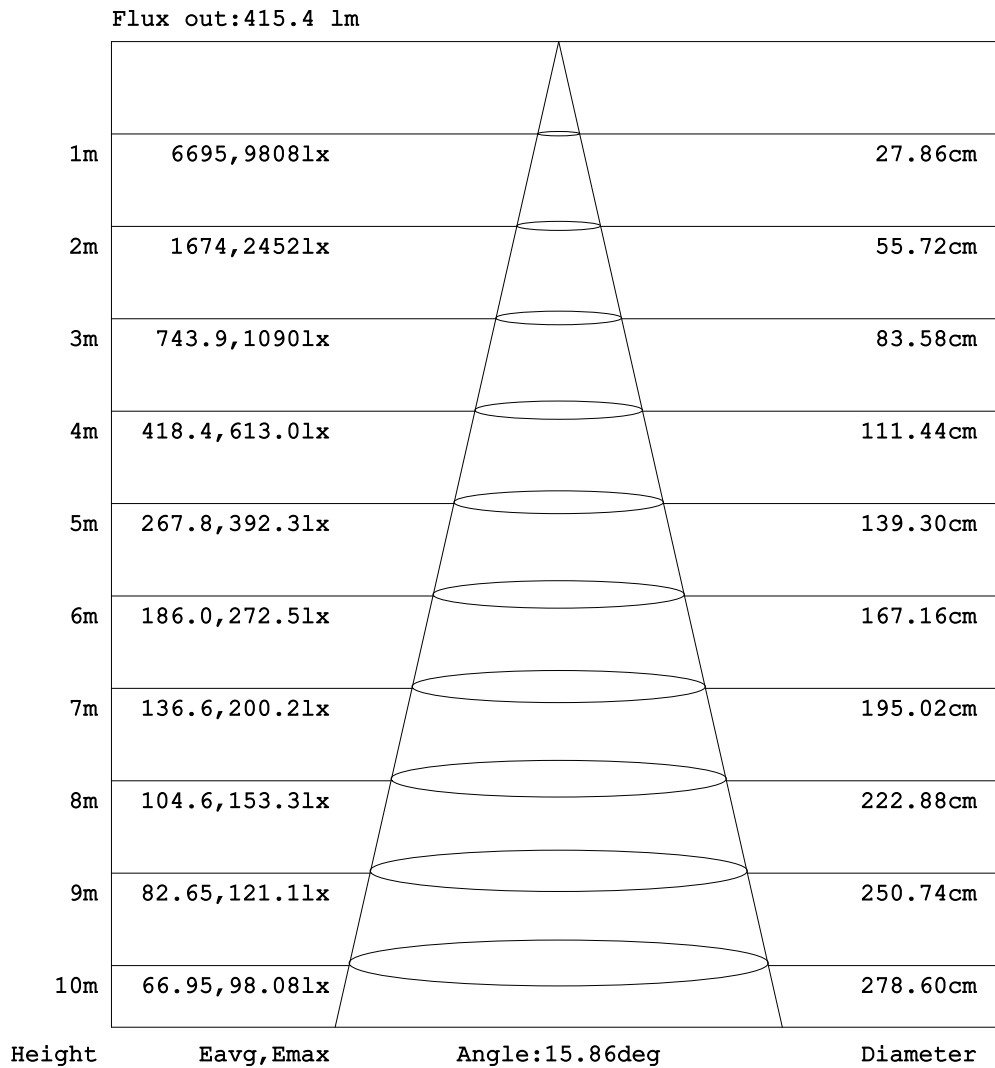


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

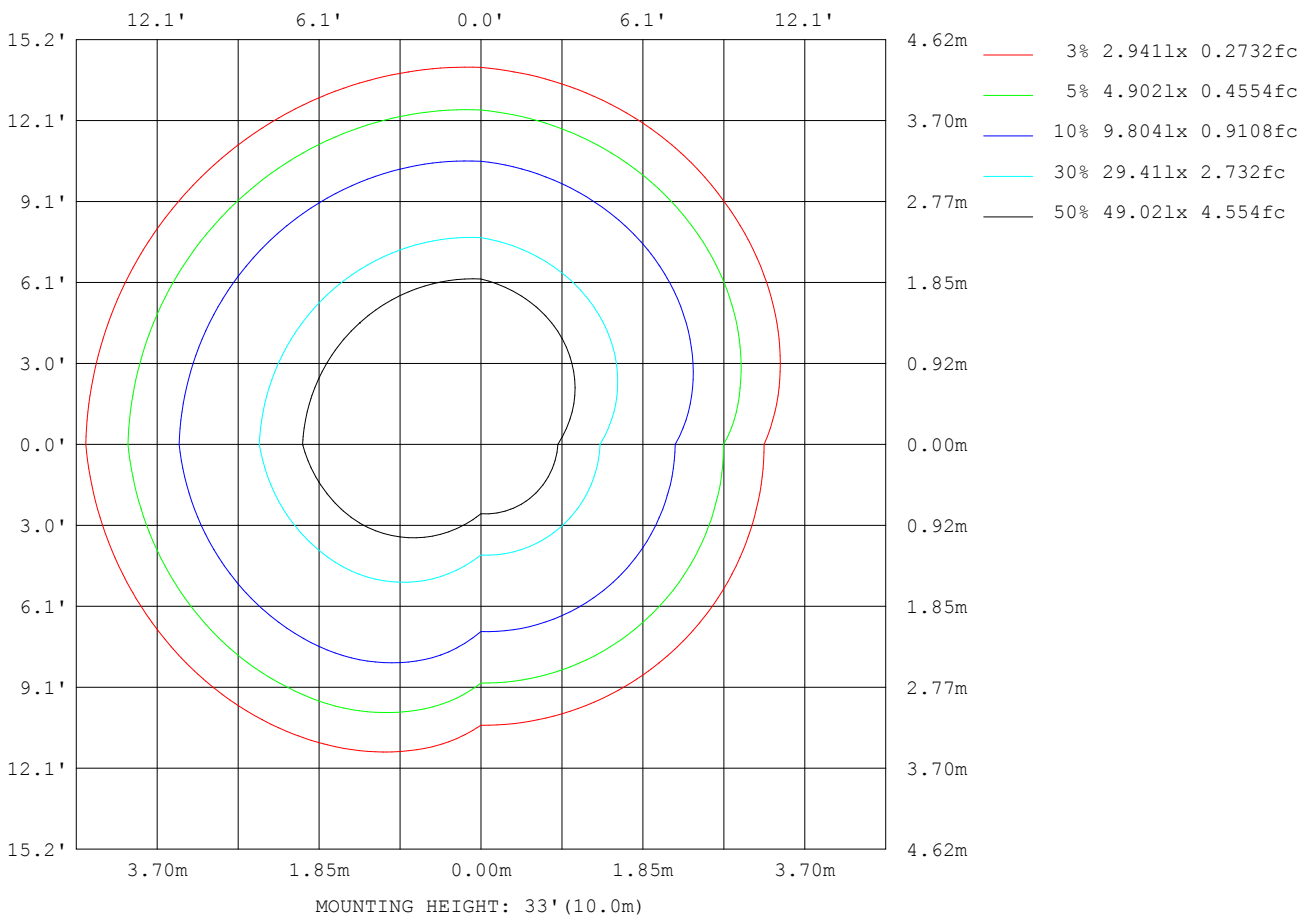

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	0
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	0
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	0
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

Planar Illuminance Curve

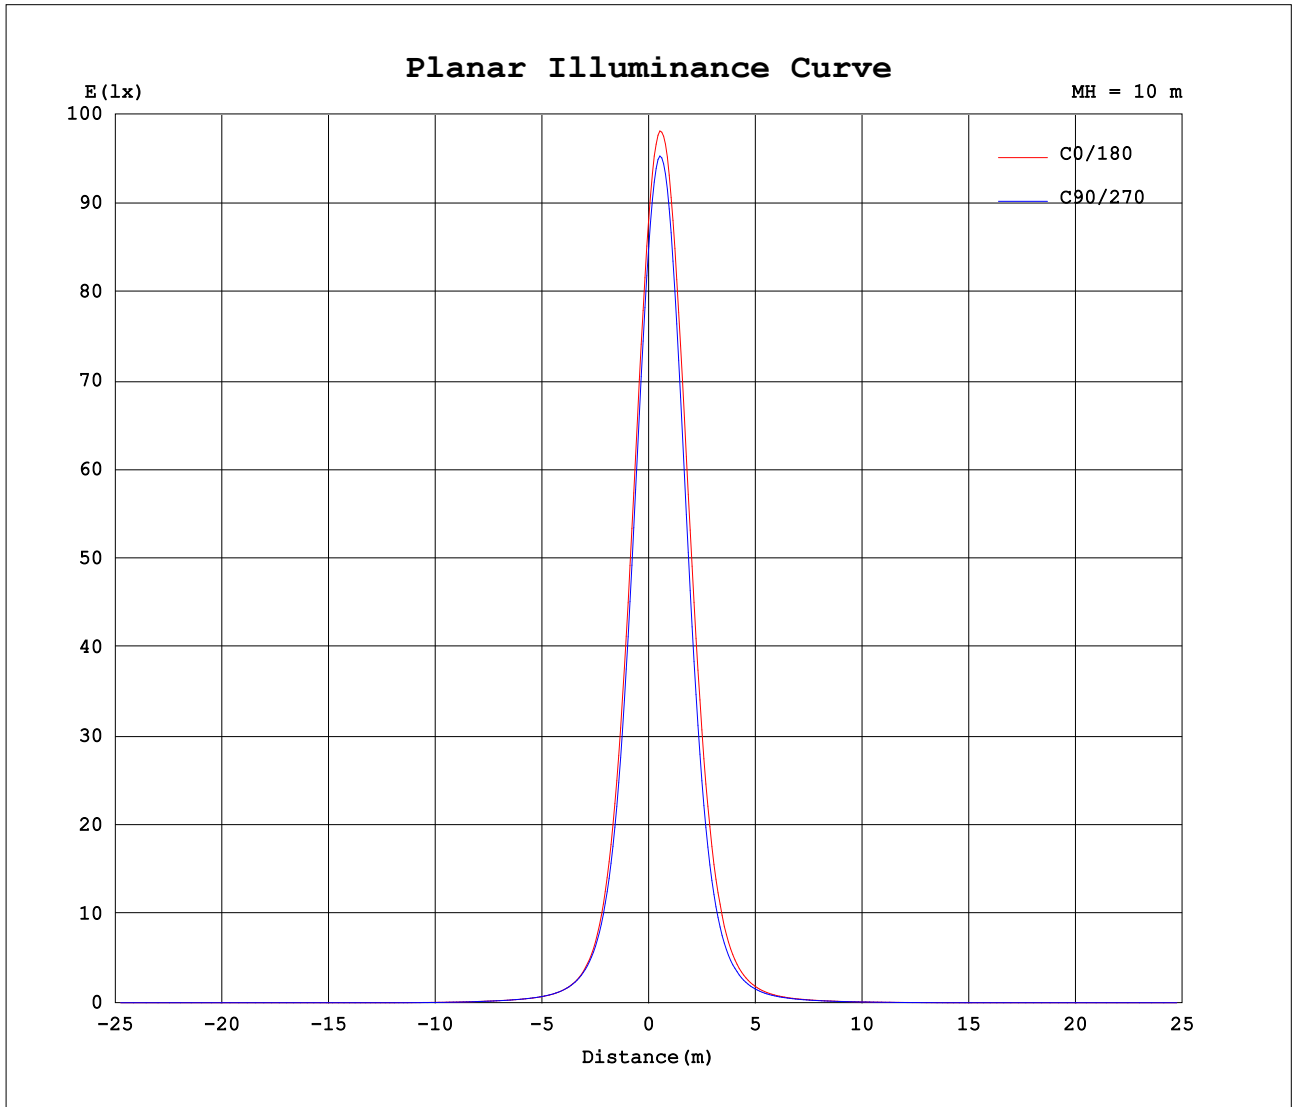

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Xie Bi
 Test Date: 2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 6.810m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:232.30V I:0.1689A P:31.788W PF:0.8102 Freq:49.99Hz Lamp Flux:1188.78x1 lm		
NAME: W21303LED-X	TYPE:	WEIGHT:
SPEC.:P-W21303LED-X-3x10W3015-CI30031R90-YML100	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	8821	8504	8821	8504															
5	4974	4567	9624	9259															
10	1862	1644	6432	5750															
15	605	571	2731	2188															
20	238	235	927	723															
25	116	117	338	279															
30	68.1	69.1	148	130															
35	43.1	42.4	78.1	71.7															
40	25.2	23.7	45.7	42.4															
45	11.6	9.39	26.3	25.3															
50	2.98	1.31	12.4	11.7															
55	0.27	0.04	3.13	1.97															
60	0.00	0.00	0.20	0.10															
65	0.00	0.00	0.00	0.00															
70	0.00	0.00	0.00	0.00															
75	0.00	0.00	0.00	0.00															
80	0.00	0.00	0.00	0.00															
85	0.00	0.00	0.00	0.00															
90	0.00	0.00	0.00	0.00															
95	0.00	0.00	0.00	0.00															
100	0.00	0.00	0.00	0.00															
105	0.00	0.00	0.00	0.00															
110	0.00	0.00	0.00	0.00															
115	0.00	0.00	0.00	0.00															
120	0.00	0.00	0.01	0.00															
125	0.01	0.02	0.02	0.01															
130	0.06	0.06	0.05	0.03															
135	0.16	0.15	0.08	0.06															
140	0.43	0.35	0.12	0.10															
145	1.15	0.95	0.20	0.17															
150	2.67	2.56	0.42	0.35															
155	4.89	5.23	1.06	0.87															
160	6.85	7.54	2.54	2.19															
165	7.31	7.91	4.53	4.23															
170	6.13	6.56	5.85	5.85															
175	4.82	5.28	5.65	5.97															
180	4.83	5.35	4.82	5.36															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-09-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks: