
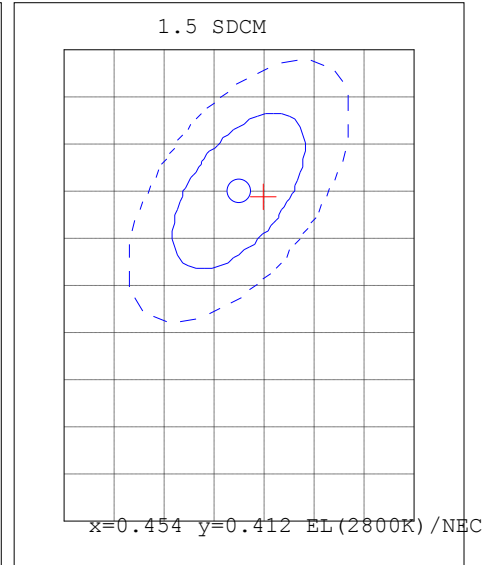


NL

## Light Source Test Report

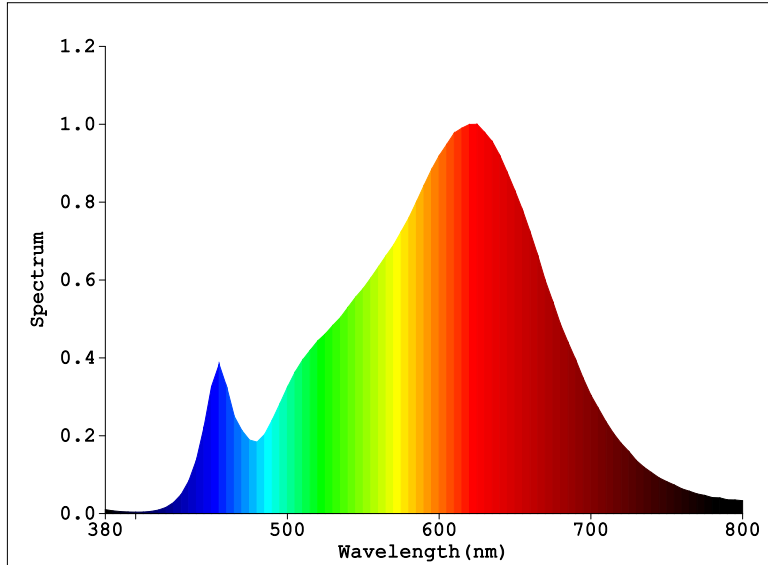

### Color Parameters:

Chromaticity Coordinate:  $x=0.4561$  ( $dx=0.0011$ )  $y=0.4115$  ( $dy=0.0021$ )

Chromaticity Coordinate:  $u'=0.2597$   $v'=0.5271$  ( $duv=6.68e-04$ )

$T_c=2761K$  Dominant WL:  $L_d=583.7nm$  Purity=60.4% Centroid WL: 605.0nm

Ratio: R=27.5% G=70.3% B=2.2% Peak WL:  $L_p=625.0nm$  HWL: 144.7nm

Render Index:  $R_a=91.9$

R1 =92 R2 =96 R3 =99 R4 =92 R5 =92 R6 =96 R7 =91

R8 =78 R9 =53 R10=90 R11=93 R12=83 R13=93 R14=99 R15=87

### Photo Parameters:

Flux: 1601.3 lm Fe: 5.5580 W Efficacy: 64.42 lm/W

WHITE: ANSI\_2700K

### Electrical Parameters:

Lamp : U=230.7V I=0.1142A P=24.86W PF=0.9437

#### Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm[0]

REF=40638 (R=3)  $\% = 0.015\%$

$I_p=26626$  ( $G=4, D=57$ )

PMT: 25.3 centigrade [150.0]

---

Product Type: J-11361LED-X-25W2724-CI-M036P90-08600CETTIGA

Number: 1

Temperature: 25.3 deg

Test Operator: Xie Bi

Software: V3.00.135

Test Department:

Humidity: 65.0%

Test Date: 2023-03-02 14:57:45

Instrument: PMS-80\_V1 (SN: G107113CF1331122)