
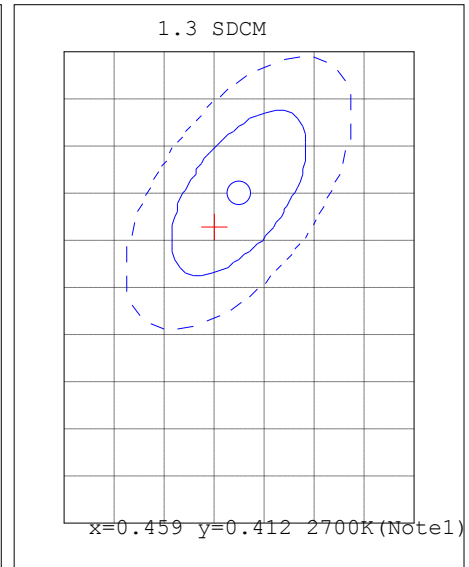


NL

Light Source Test Report

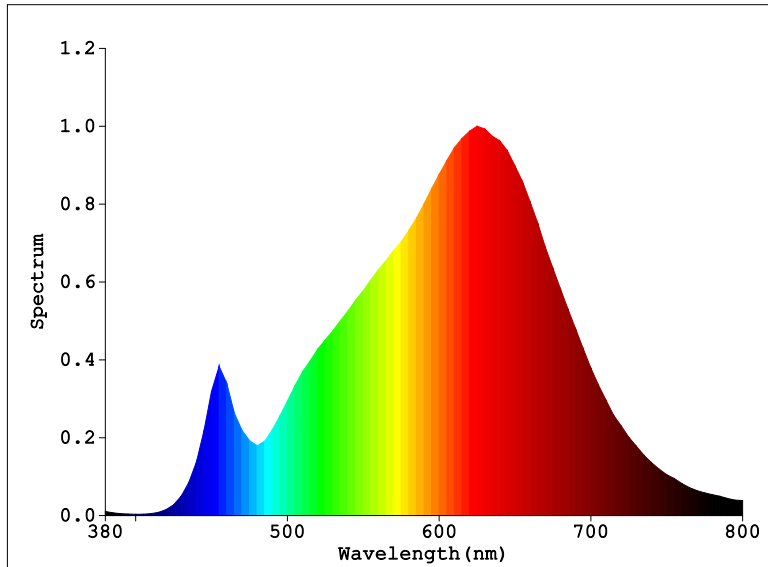

Color Parameters:

Chromaticity Coordinate: $x=0.4569$ ($dx=-0.0005$) $y=0.4091$ ($dy=-0.0009$)Chromaticity Coordinate: $u'=0.2613$ $v'=0.5263$ ($duv=-2.90e-04$)

Tc=2730K Dominant WL:Ld=584.2nm Purity=59.9% Centroid WL:611.0nm

Ratio:R=27.9% G=70.0% B=2.2% Peak WL:Lp=625.0nm HWL:153.1nm

Render Index:Ra=93.3

R1 =94 R2 =97 R3 =98 R4 =93 R5 =93 R6 =96 R7 =93

R8 =84 R9 =65 R10=91 R11=94 R12=82 R13=94 R14=98 R15=90

Photo Parameters:

Flux: 687.73 lm Fe: 2.5162 W Efficacy:54.81 lm/W

WHITE:ANSI_2700K

Electrical Parameters:

Lamp : U=230.6V I=0.05775A P=12.55W PF=0.9422

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]

REF=20499 (R=3)

%=-0.020%

Ip=43355 (G=5,D=62)

PMT: 29.4 centigrade [150.0]

Product Type:J-W213011LED-X-12W2736-K-M3503A-R90-AM-L100

Number:1

Temperature:25.3 deg

Test Operator:Xie Bi

Software:V3.00.135

Test Department:

Humidity:65.0%

Test Date:2022-10-20 14:28:12

Instrument:PMS-80_V1 (SN:G107113CF1331122)