


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm					
NAME: 250500LED		TYPE:		WEIGHT:	
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700		DIM.:		SERIAL No.:	
MFR.: CETTIGA		SUR.:0.0003		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 63.13 lm/W
MODEL	CLU701 1002	I _{max} (cd)	10301	S/MH(C0/180)	0.22	
NOMINAL POWER(W)	15W	LOR(%)	100.0	S/MH(C90/270)	0.20	
RATED VOLTAGE(V)	220.0	TOTAL FLUX(lm)	895.01	η UP,DN(C0-180)	0.2,58.4	
NOMINAL FLUX(lm)	895.013	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,41.2	
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	220.2	η down(%)	99.7	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

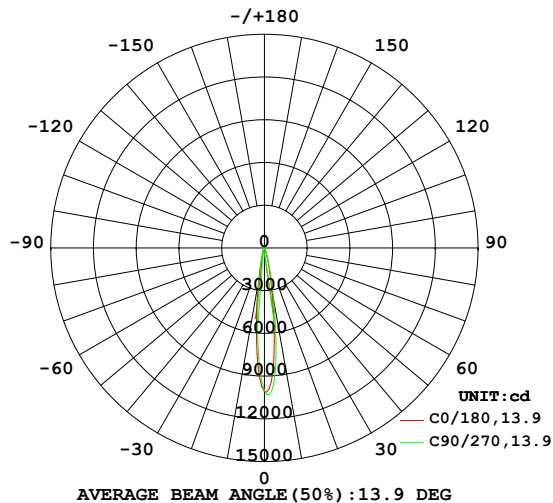

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

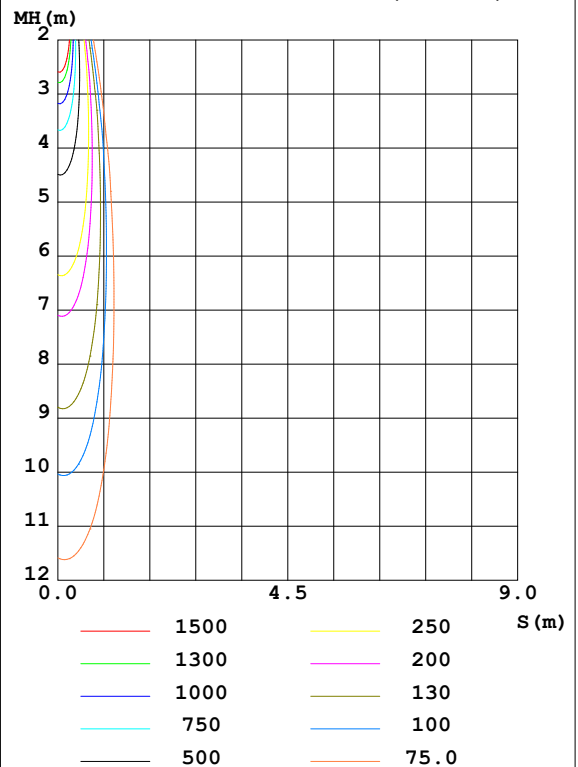

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	302.1	381.5	236.0	199.7					0- 10	528.2	528.2	59,59
20	29.42	41.71	24.17	24.60					10- 20	280.4	808.6	90.3,90.3
30	5.054	5.705	4.306	4.092					20- 30	58.01	866.6	96.8,96.8
40	1.661	1.504	1.587	1.429					30- 40	16.95	883.6	98.7,98.7
50	0.4066	0.3212	0.3438	0.2502					40- 50	6.440	890.0	99.4,99.4
60	0.1232	0.0644	0.1073	0.0482					50- 60	1.644	891.7	99.6,99.6
70	0.0110	0.0023	0.0023	0.0075					60- 70	0.3649	892.0	99.7,99.7
80	0.0035	0	0	0.0035					70- 80	0.0385	892.1	99.7,99.7
90	0.0006	0	0.0000	0.0017					80- 90	0.0119	892.1	99.7,99.7
100	0	0	0.0006	0.0023					90-100	0.0066	892.1	99.7,99.7
110	0	0	0.0017	0.0017					100-110	0.0071	892.1	99.7,99.7
120	0	0.0012	0.0035	0.0017					110-120	0.0114	892.1	99.7,99.7
130	0.0017	0.0041	0.0052	0.0023					120-130	0.0214	892.1	99.7,99.7
140	0.0093	0.0145	0.0110	0.0099					130-140	0.0439	892.2	99.7,99.7
150	0.0985	0.0900	0.0482	0.0545					140-150	0.1943	892.4	99.7,99.7
160	0.4531	0.4240	0.2795	0.3134					150-160	0.8759	893.3	99.8,99.8
170	0.5341	0.5559	0.4625	0.4527					160-170	1.343	894.6	100,100
180	0.3540	0.3453	0.3534	0.3435					170-180	0.4163	895.0	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:

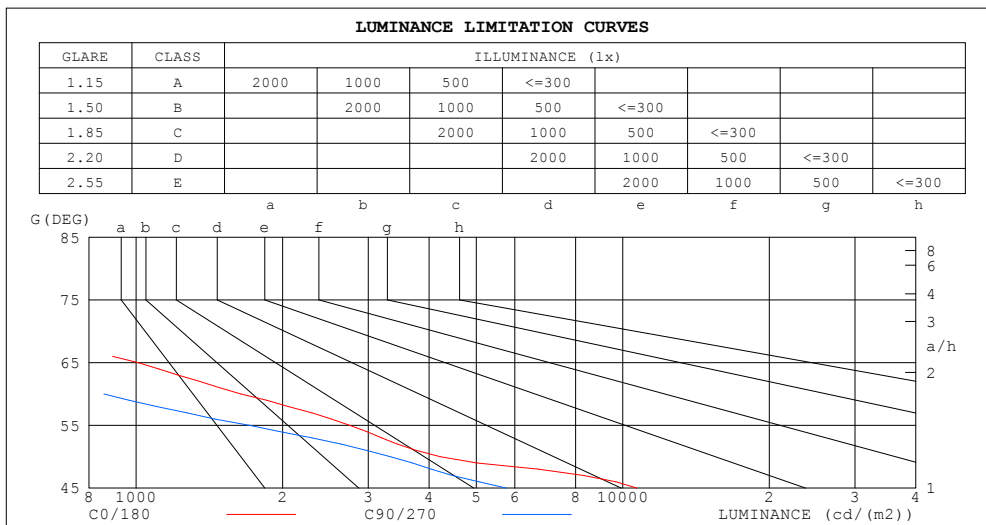

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	89	0
80	134	0
75	135	30
70	215	45
65	1009	156
60	1642	859
55	2747	1712
50	4217	3332
45	10697	5766


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.14	1.12	1.11	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.02	1.01	.00	.99	.98
2.0	1.09	1.07	1.05	1.08	1.06	1.04	1.05	1.03	1.01	1.02	1.00	.99	.99	.98	.97	.96
3.0	1.06	1.03	1.00	1.05	1.02	.00	1.02	.00	.98	.00	.98	.97	.98	.96	.95	.94
4.0	1.03	.99	.97	1.02	.99	.96	.00	.97	.95	.98	.96	.94	.96	.95	.93	.92
5.0	1.00	.97	.94	.99	.96	.94	.98	.95	.93	.96	.94	.92	.95	.93	.91	.91
6.0	.98	.94	.92	.97	.94	.92	.96	.93	.91	.95	.92	.90	.93	.91	.90	.89
7.0	.96	.92	.90	.95	.92	.90	.94	.91	.89	.93	.91	.89	.92	.90	.88	.88
8.0	.94	.90	.88	.93	.90	.88	.92	.90	.88	.92	.89	.87	.91	.89	.87	.86
9.0	.92	.89	.87	.92	.89	.86	.91	.88	.86	.90	.88	.86	.90	.87	.86	.85
10.0	.90	.87	.85	.90	.87	.85	.89	.87	.85	.89	.86	.85	.88	.86	.84	.84

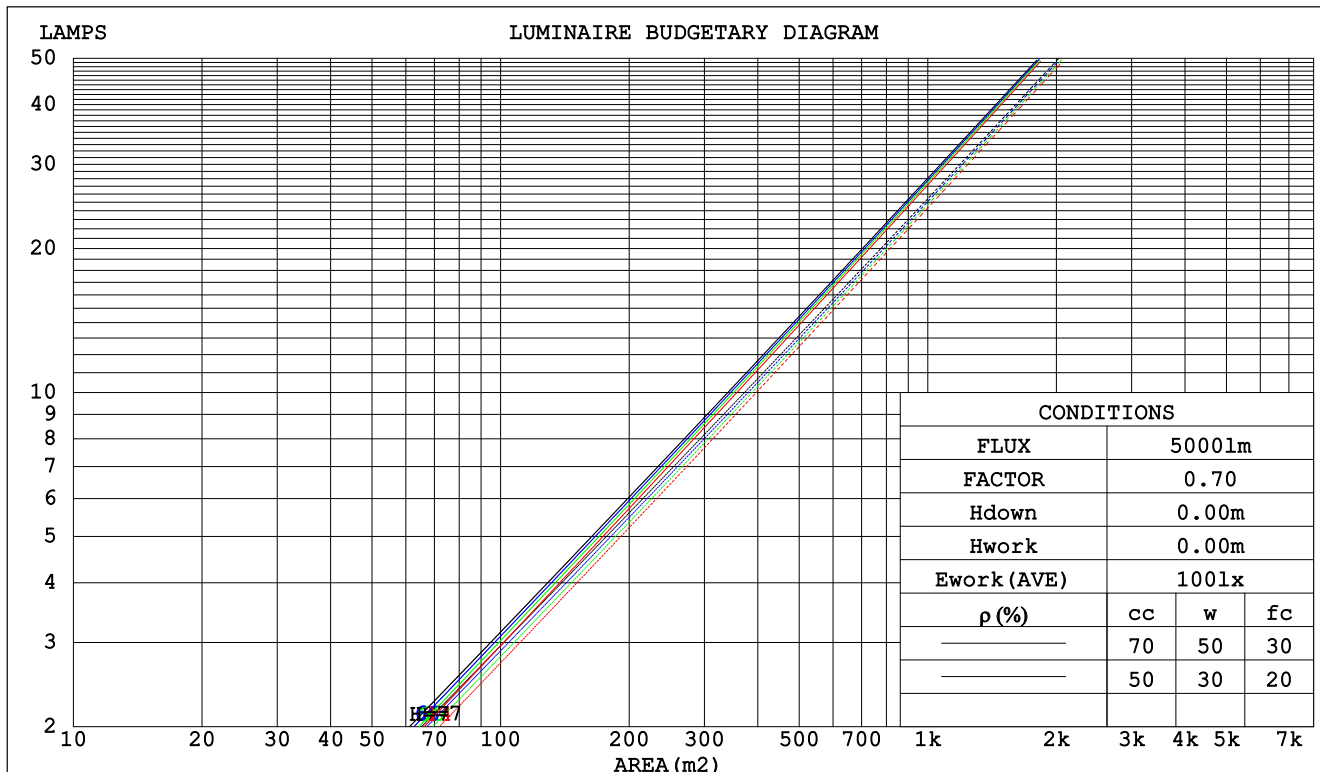

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.119	.068	.021	.112	.064	.020	.100	.057	.018	.088	.051	.016	.078	.045	.015		
2.0	.109	.059	.018	.103	.057	.017	.093	.052	.016	.083	.047	.015	.075	.042	.013		
3.0	.100	.053	.016	.095	.051	.015	.087	.047	.014	.079	.043	.013	.072	.040	.012		
4.0	.092	.048	.014	.089	.046	.014	.082	.043	.013	.075	.040	.012	.069	.037	.011		
5.0	.086	.044	.013	.083	.043	.012	.077	.040	.012	.071	.038	.011	.066	.035	.011		
6.0	.081	.040	.012	.078	.039	.011	.073	.037	.011	.068	.035	.010	.064	.033	.010		
7.0	.076	.037	.011	.073	.037	.010	.069	.035	.010	.065	.033	.010	.061	.032	.009		
8.0	.072	.035	.010	.070	.034	.010	.066	.033	.009	.062	.032	.009	.059	.030	.009		
9.0	.068	.033	.009	.066	.032	.009	.063	.031	.009	.060	.030	.009	.057	.029	.008		
10.0	.065	.031	.009	.063	.030	.009	.060	.029	.008	.057	.029	.008	.055	.028	.008		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.170	.160	.152	.145	.138	.131	.099	.095	.090	.057	.055	.053	.018	.018	.017	
2.0	.150	.135	.123	.129	.116	.106	.088	.081	.074	.051	.047	.043	.016	.015	.014	
3.0	.134	.116	.101	.115	.100	.087	.079	.069	.061	.046	.040	.036	.015	.013	.012	
4.0	.121	.100	.084	.104	.086	.073	.071	.060	.052	.041	.035	.030	.013	.011	.010	
5.0	.109	.087	.071	.094	.076	.062	.065	.053	.044	.037	.031	.026	.012	.010	.009	
6.0	.100	.077	.061	.086	.067	.053	.059	.047	.038	.034	.027	.022	.011	.009	.007	
7.0	.092	.069	.053	.079	.059	.046	.054	.042	.032	.032	.025	.019	.010	.008	.006	
8.0	.084	.062	.046	.073	.053	.040	.050	.037	.028	.029	.022	.017	.009	.007	.006	
9.0	.078	.056	.040	.068	.048	.035	.047	.034	.025	.027	.020	.015	.009	.007	.005	
10.0	.073	.051	.036	.063	.044	.031	.044	.031	.022	.026	.018	.013	.008	.006	.004	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm											
NAME.: 250500LED						TYPE:			WEIGHT:		
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700						DIM.:			SERIAL No.:		
MFR.: CETTIGA						SUR.:0.0003			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.9	8.4	8.1	8.6	8.7	7.5	8.0	7.7	8.2	8.3	
	3H	7.8	8.3	8.0	8.5	8.7	7.4	7.8	7.6	8.0	8.2
	4H	7.7	8.2	8.0	8.4	8.6	7.3	7.7	7.5	8.0	8.2
	6H	7.6	8.1	7.9	8.3	8.6	7.2	7.6	7.5	7.9	8.1
	8H	7.6	8.0	7.9	8.3	8.5	7.2	7.6	7.4	7.8	8.1
	12H	7.5	8.0	7.9	8.2	8.5	7.1	7.5	7.4	7.8	8.1
4H	2H	7.7	8.2	8.0	8.4	8.6	7.3	7.8	7.6	8.0	8.2
	3H	7.6	8.0	7.9	8.3	8.5	7.1	7.6	7.4	7.8	8.1
	4H	7.5	7.9	7.8	8.2	8.5	7.0	7.4	7.4	7.7	8.0
	6H	7.4	7.7	7.7	8.1	8.4	6.9	7.3	7.3	7.6	8.0
	8H	7.3	7.6	7.7	8.0	8.4	6.9	7.2	7.3	7.6	7.9
	12H	7.3	7.6	7.7	7.9	8.3	6.8	7.1	7.2	7.5	7.9
8H	4H	7.3	7.6	7.7	8.0	8.4	6.9	7.2	7.3	7.6	7.9
	6H	7.2	7.5	7.6	7.9	8.3	6.8	7.0	7.2	7.4	7.8
	8H	7.1	7.4	7.6	7.8	8.2	6.7	6.9	7.1	7.4	7.8
	12H	7.1	7.3	7.5	7.7	8.2	6.6	6.8	7.1	7.3	7.8
12H	4H	7.3	7.6	7.7	7.9	8.3	6.8	7.1	7.2	7.5	7.9
	6H	7.1	7.4	7.6	7.8	8.2	6.7	6.9	7.1	7.4	7.8
	8H	7.1	7.3	7.5	7.7	8.2	6.6	6.8	7.1	7.3	7.8
Variations with the observer position at spacings:											
S = 1.0H	+ 2.6 / - 7.6					+ 2.6 / -10.3					
1.5H	+ 3.9 / - 6.4					+ 4.5 / - 6.6					
2.0H	+ 6.6 / - 8.5					+ 5.3 / - 9.7					

CIE Pub.117, 895.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.4)
Area: 0.0015 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	81	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	102	97	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	107	104	102	96
3.00	113	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	113	112	110	109	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:

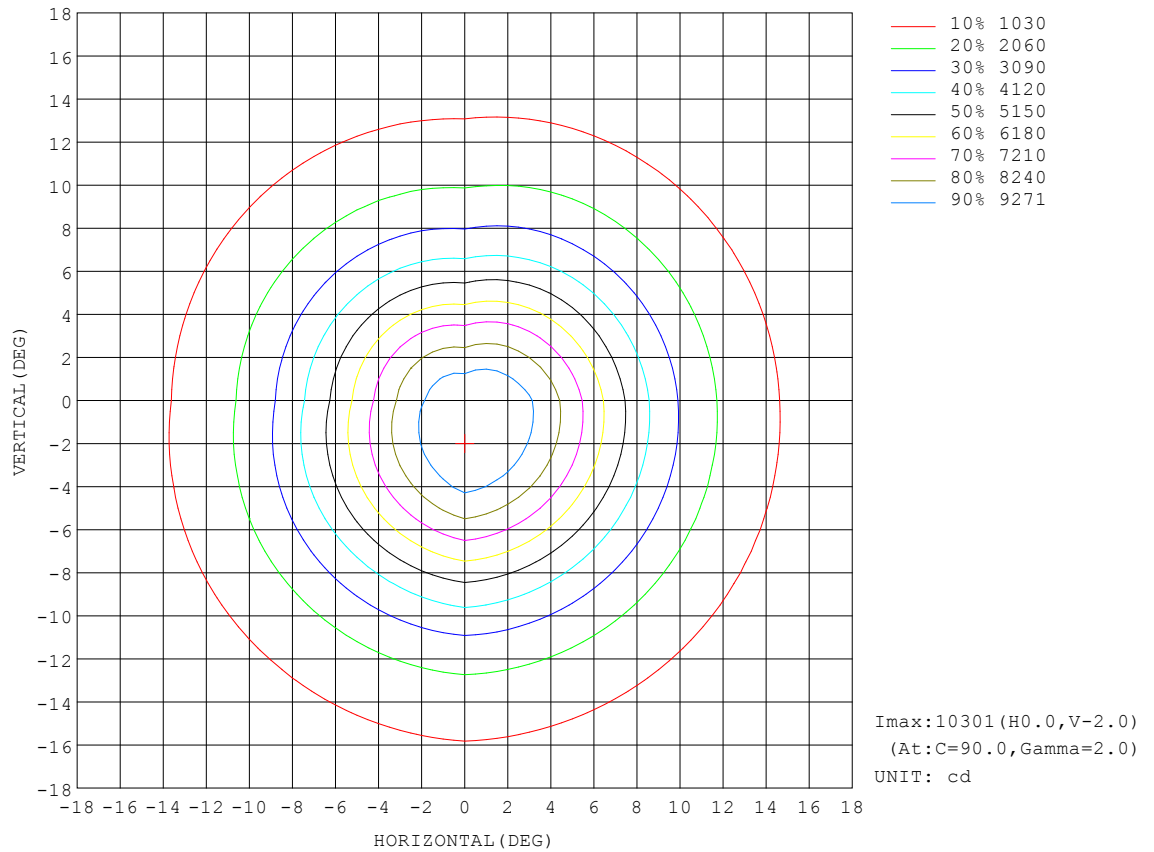


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.900m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:

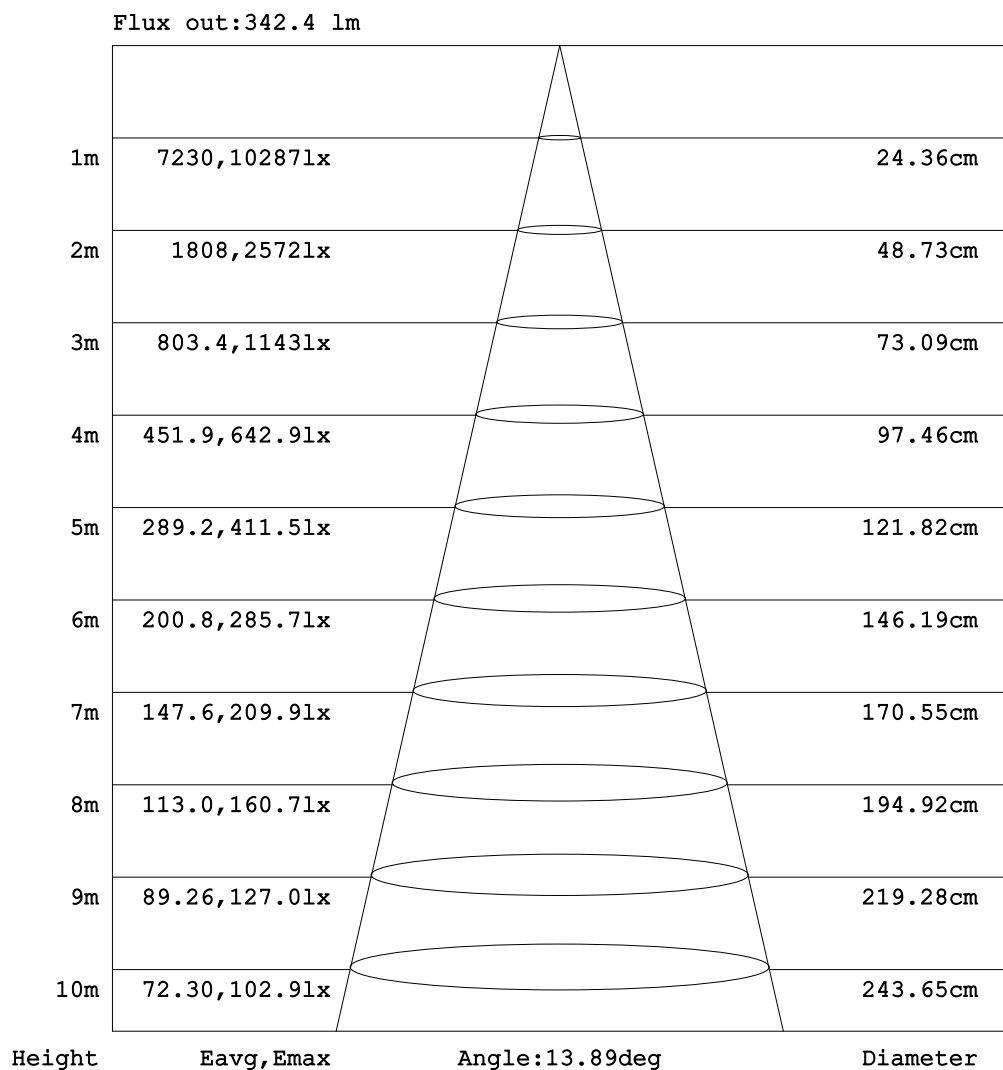


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.900m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:

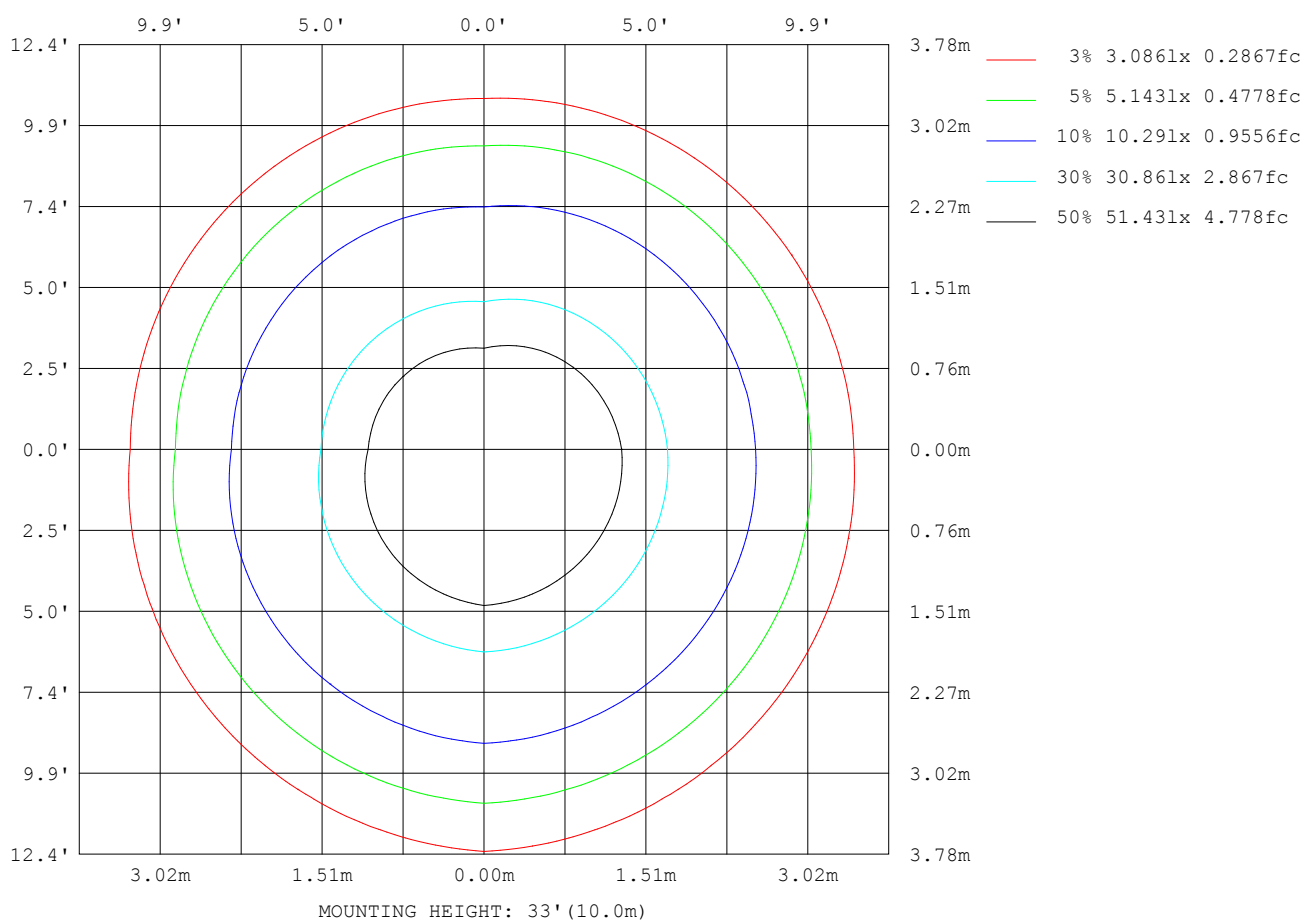

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	957
L_0~180 (75) av	97
L_0~180 (85) av	45
L_90~270 (65) av	183
L_90~270 (75) av	82
L_90~270 (85) av	111
L_45 (65) av	470
L_45 (75) av	85
L_45 (85) av	88

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.900m [K=1.0000]
 Remarks:

Planar Illuminance Curve

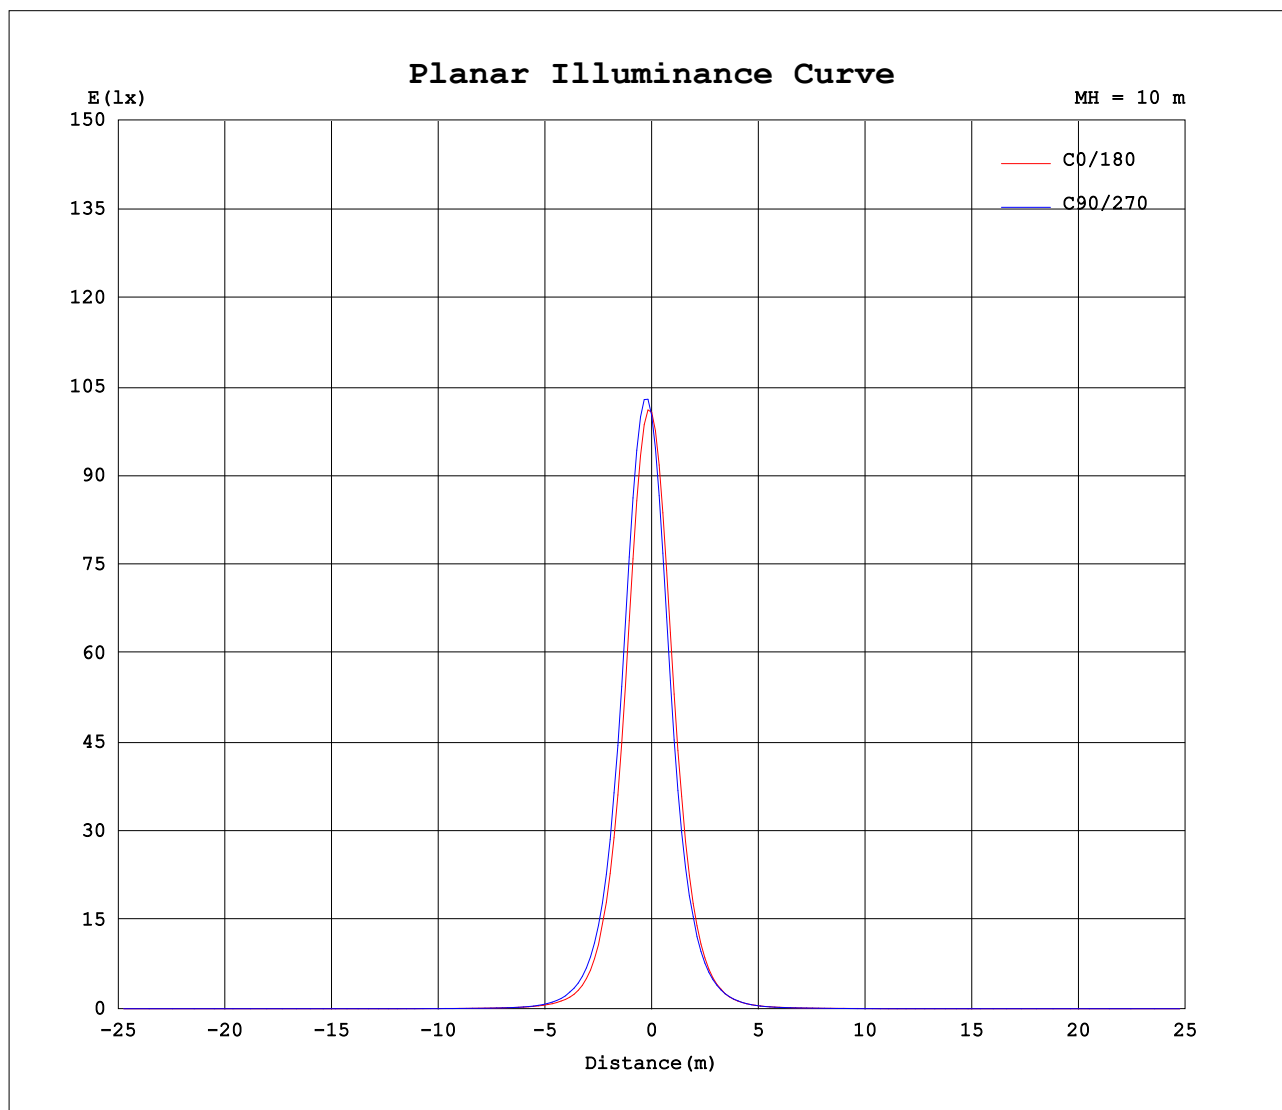

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Xie Bi
Test Date: 2020-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 6.900m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.64V I:0.0680A P:14.178W PF:0.9444 Freq:59.98Hz Lamp Flux:895.013x1 lm		
NAME: 250500LED	TYPE:	WEIGHT:
SPEC.:P-250500LED-15W2715-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0003	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	90	180	270															
0	1007	1001	1007	1001															
5	768	872	642	560															
10	302	381	236	200															
15	93.8	123	74.1	68.2															
20	29.4	41.7	24.2	24.6															
25	11.4	15.0	9.32	9.22															
30	5.05	5.71	4.31	4.09															
35	2.83	2.69	2.42	2.29															
40	1.66	1.50	1.59	1.43															
45	1.13	0.61	0.94	0.48															
50	0.41	0.32	0.34	0.25															
55	0.24	0.15	0.20	0.11															
60	0.12	0.06	0.11	0.05															
65	0.06	0.01	0.06	0.01															
70	0.01	0.00	0.00	0.01															
75	0.01	0.00	0.00	0.01															
80	0.00	0.00	0.00	0.00															
85	0.00	0.00	0.00	0.00															
90	0.00	0.00	0.00	0.00															
95	0.00	0.00	0.00	0.00															
100	0.00	0.00	0.00	0.00															
105	0.00	0.00	0.00	0.00															
110	0.00	0.00	0.00	0.00															
115	0.00	0.00	0.00	0.00															
120	0.00	0.00	0.00	0.00															
125	0.00	0.00	0.00	0.00															
130	0.00	0.00	0.01	0.00															
135	0.00	0.01	0.01	0.00															
140	0.01	0.01	0.01	0.01															
145	0.03	0.04	0.02	0.02															
150	0.10	0.09	0.05	0.05															
155	0.25	0.22	0.13	0.15															
160	0.45	0.42	0.28	0.31															
165	0.57	0.57	0.43	0.45															
170	0.53	0.56	0.46	0.45															
175	0.41	0.43	0.39	0.36															
180	0.35	0.35	0.35	0.34															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks: