


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 69.72 lm/W			
MODEL	CLU7A2 1201	I _{max} (cd)	2401	S/MH (C0/180)	0.38
NOMINAL POWER (W)	7W	LOR (%)	100.0	S/MH (C90/270)	0.37
RATED VOLTAGE (V)	220.0	TOTAL FLUX (lm)	468.58	η UP, DN (C0-180)	0.2, 49.1
NOMINAL FLUX (lm)	468.583	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 50.6
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	220.2	η down (%)	99.7	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

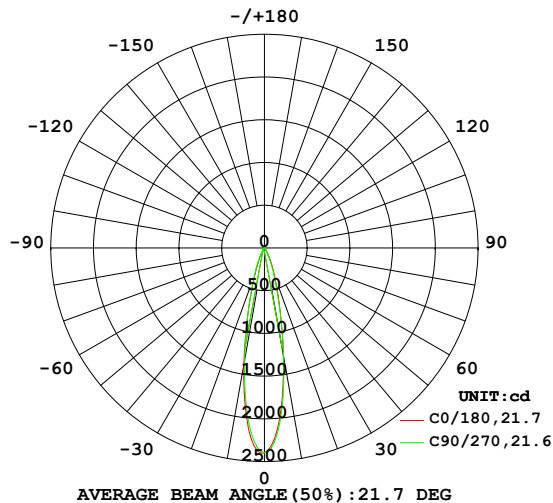

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

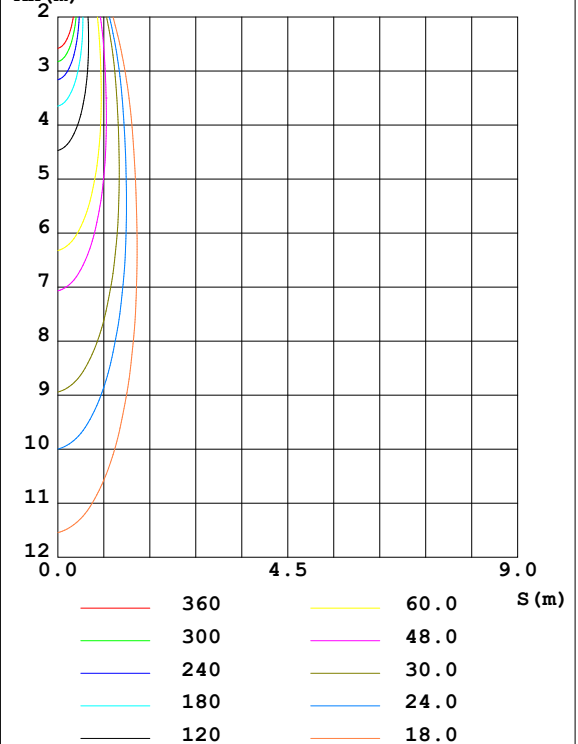

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Xie Bi
Test Date: 2019-10-22

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 6.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	1277	1299	1381	1341					0- 10	172.7	172.7	36.9,36.9
20	343.0	314.4	316.6	347.1					10- 20	191.5	364.3	77.7,77.7
30	81.71	66.99	62.16	79.44					20- 30	76.62	440.9	94.1,94.1
40	12.80	11.29	9.858	12.12					30- 40	19.77	460.7	98.3,98.3
50	2.781	2.525	2.495	2.876					40- 50	4.549	465.2	99.3,99.3
60	0.9465	0.7737	0.7687	0.9558					50- 60	1.391	466.6	99.6,99.6
70	0.0956	0.0571	0.0760	0.1146					60- 70	0.4218	467.0	99.7,99.7
80	0.0287	0.0095	0.0096	0.0287					70- 80	0.0402	467.1	99.7,99.7
90	0.0048	0	0.0048	0.0096					80- 90	0.0112	467.1	99.7,99.7
100	0	0	0.0096	0.0048					90-100	0.0041	467.1	99.7,99.7
110	0	0.0048	0.0096	0.0048					100-110	0.0046	467.1	99.7,99.7
120	0	0.0096	0.0191	0.0048					110-120	0.0073	467.1	99.7,99.7
130	0.0143	0.0526	0.0478	0.0239					120-130	0.0172	467.1	99.7,99.7
140	0.1719	0.2390	0.1291	0.0907					130-140	0.0574	467.2	99.7,99.7
150	0.7826	0.8599	0.4348	0.3580					140-150	0.2060	467.4	99.7,99.7
160	1.920	2.002	1.224	1.170					150-160	0.4823	467.8	99.8,99.8
170	2.283	2.302	1.958	1.877					160-170	0.5391	468.4	100,100
180	2.025	2.011	2.016	2.006					170-180	0.1968	468.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

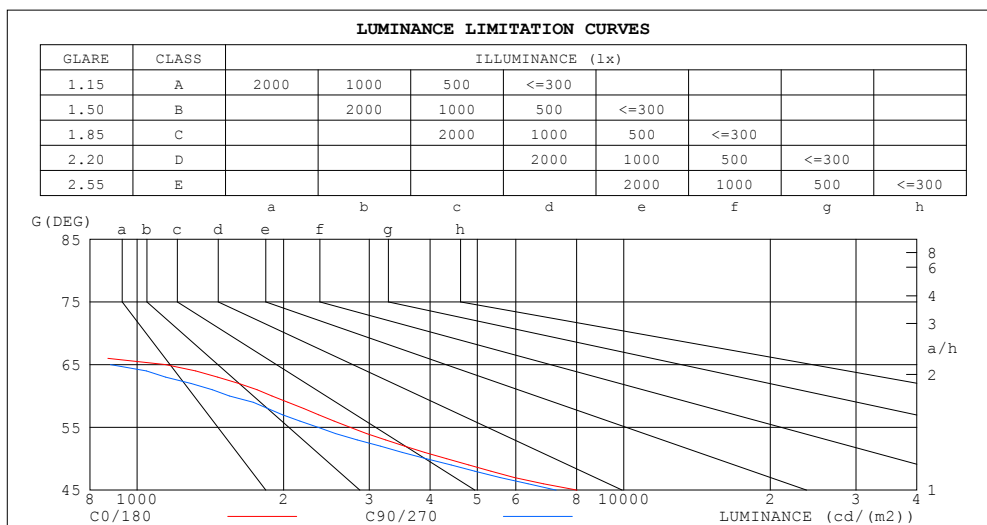

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	164	0
80	165	55
75	203	74
70	279	167
65	1144	882
60	1893	1547
55	2741	2355
50	4327	3928
45	8014	7260


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	.00	.98	.97	.97	.96	.95	.93
3.0	1.03	.99	.96	1.02	.98	.96	.99	.96	.94	.97	.95	.93	.95	.93	.91	.90
4.0	.99	.95	.92	.98	.94	.91	.96	.93	.90	.94	.91	.89	.92	.90	.88	.87
5.0	.95	.91	.88	.94	.91	.88	.93	.89	.87	.91	.88	.86	.90	.87	.85	.84
6.0	.92	.88	.85	.91	.87	.85	.90	.87	.84	.89	.86	.83	.87	.85	.83	.82
7.0	.89	.85	.82	.88	.84	.82	.87	.84	.81	.86	.83	.81	.85	.83	.80	.79
8.0	.86	.82	.79	.86	.82	.79	.85	.81	.79	.84	.81	.79	.83	.80	.78	.77
9.0	.84	.80	.77	.83	.79	.77	.83	.79	.77	.82	.79	.76	.81	.78	.76	.75
10.0	.81	.77	.75	.81	.77	.75	.80	.77	.74	.80	.77	.74	.79	.76	.74	.73

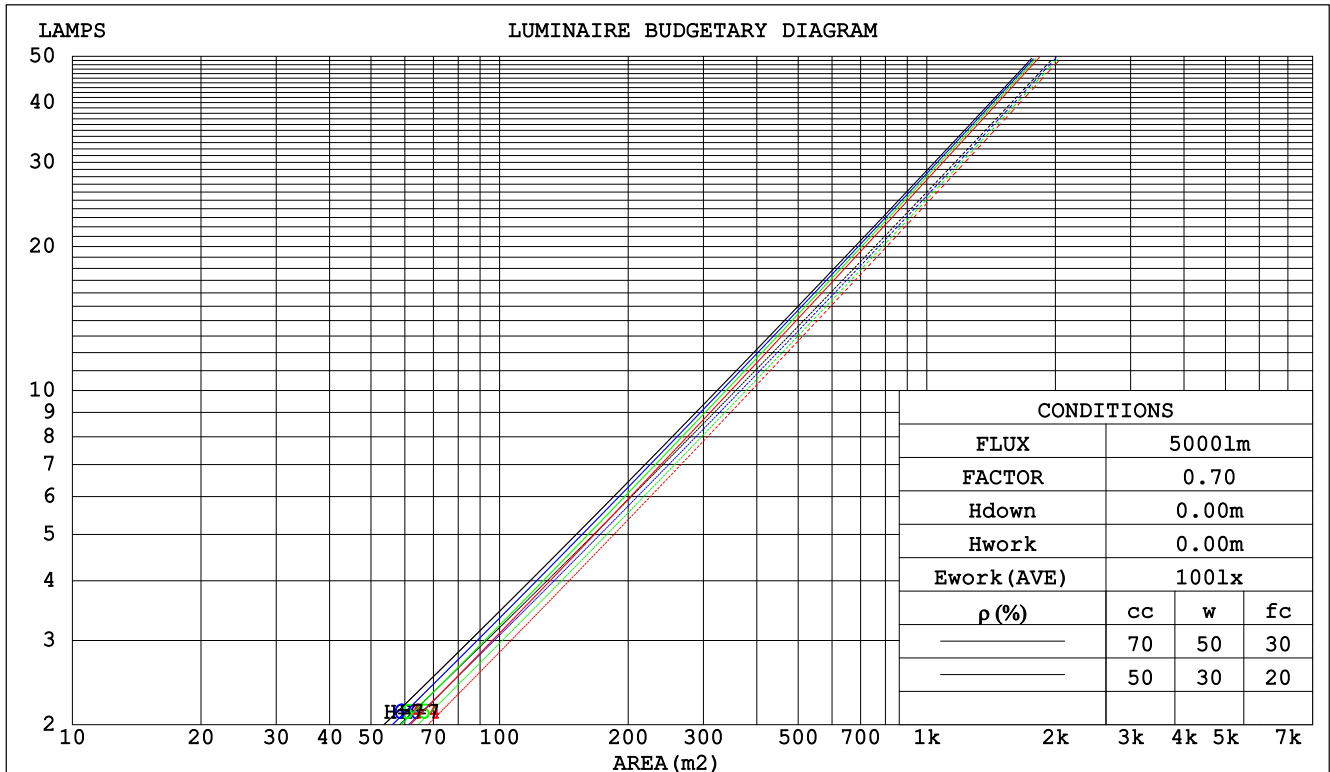

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.137	.078	.025	.130	.074	.024	.118	.067	.022	.106	.061	.020	.095	.055	.018		
2.0	.127	.070	.021	.121	.067	.021	.111	.062	.019	.102	.057	.018	.093	.052	.017		
3.0	.118	.063	.019	.114	.061	.018	.105	.057	.017	.097	.053	.016	.090	.050	.015		
4.0	.111	.058	.017	.107	.056	.017	.100	.053	.016	.093	.050	.015	.087	.047	.014		
5.0	.105	.053	.015	.101	.052	.015	.095	.050	.015	.089	.047	.014	.084	.045	.013		
6.0	.099	.050	.014	.096	.049	.014	.091	.047	.014	.086	.045	.013	.081	.043	.013		
7.0	.094	.047	.013	.092	.046	.013	.087	.044	.013	.082	.042	.012	.078	.041	.012		
8.0	.090	.044	.012	.087	.043	.012	.083	.042	.012	.079	.040	.012	.076	.039	.011		
9.0	.086	.041	.012	.084	.041	.011	.080	.040	.011	.077	.038	.011	.073	.037	.011		
10.0	.082	.039	.011	.080	.039	.011	.077	.038	.011	.074	.037	.010	.071	.036	.010		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.171	.160	.151	.146	.137	.130	.100	.095	.090	.058	.055	.052	.018	.018	.017	
2.0	.153	.135	.120	.131	.116	.104	.090	.081	.073	.052	.047	.043	.017	.015	.014	
3.0	.138	.116	.098	.118	.100	.085	.081	.069	.060	.047	.041	.035	.015	.013	.012	
4.0	.125	.100	.081	.108	.087	.071	.074	.060	.050	.043	.035	.029	.014	.012	.010	
5.0	.115	.088	.068	.099	.076	.059	.068	.053	.042	.039	.031	.025	.013	.010	.008	
6.0	.106	.078	.058	.091	.068	.051	.063	.047	.036	.036	.028	.021	.012	.009	.007	
7.0	.098	.070	.050	.085	.061	.044	.058	.043	.031	.034	.025	.018	.011	.008	.006	
8.0	.092	.063	.043	.079	.055	.038	.055	.038	.027	.032	.023	.016	.010	.007	.005	
9.0	.086	.058	.038	.074	.050	.033	.051	.035	.024	.030	.021	.014	.010	.007	.005	
10.0	.081	.053	.034	.070	.046	.030	.049	.032	.021	.028	.019	.013	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2019-10-22

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm											
NAME.: S3510LED						TYPE.:			WEIGHT.:		
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700						DIM.:			SERIAL No.:		
MFR.: CETTIGA						SUR.:0.0001			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.9	14.6	14.1	14.7	14.9	13.1	13.7	13.3	13.9	14.0	
	3H	13.8	14.4	14.0	14.6	14.8	12.9	13.5	13.2	13.7	13.9
	4H	13.7	14.3	14.0	14.5	14.7	12.9	13.4	13.1	13.7	13.9
	6H	13.6	14.2	13.9	14.4	14.6	12.8	13.3	13.1	13.6	13.8
	8H	13.6	14.1	13.9	14.3	14.6	12.7	13.3	13.0	13.5	13.8
	12H	13.5	14.0	13.8	14.3	14.6	12.7	13.2	13.0	13.5	13.7
4H	2H	13.7	14.3	14.0	14.5	14.7	12.9	13.5	13.1	13.7	13.9
	3H	13.5	14.0	13.9	14.3	14.6	12.7	13.2	13.0	13.5	13.8
	4H	13.4	13.9	13.8	14.2	14.5	12.6	13.1	13.0	13.4	13.7
	6H	13.3	13.8	13.7	14.1	14.4	12.5	12.9	12.9	13.3	13.6
	8H	13.3	13.7	13.7	14.0	14.4	12.5	12.8	12.9	13.2	13.6
	12H	13.2	13.6	13.6	14.0	14.4	12.4	12.8	12.8	13.1	13.5
8H	4H	13.3	13.7	13.7	14.0	14.4	12.5	12.8	12.9	13.2	13.6
	6H	13.2	13.5	13.6	13.9	14.3	12.4	12.7	12.8	13.1	13.5
	8H	13.1	13.4	13.6	13.8	14.3	12.3	12.6	12.7	13.0	13.4
	12H	13.0	13.3	13.5	13.7	14.2	12.2	12.5	12.7	12.9	13.4
12H	4H	13.2	13.6	13.6	14.0	14.3	12.4	12.8	12.8	13.1	13.5
	6H	13.1	13.4	13.6	13.8	14.3	12.3	12.6	12.7	13.0	13.4
	8H	13.0	13.3	13.5	13.7	14.2	12.2	12.5	12.7	12.9	13.4
Variations with the observer position at spacings:											
S = 1.0H	+ 3.6 / - 8.3					+ 3.1 / - 8.6					
1.5H	+ 5.6 / - 6.5					+ 5.1 / - 6.2					
2.0H	+ 5.2 / - 4.8					+ 5.0 / - 4.9					

CIE Pub.117, 468.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.6)

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2019-10-22

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.800m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	81	90	85	81	89	84	81	78
0.80	98	92	89	97	92	89	96	91	88	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	114	112	113	112	110	109	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.800m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

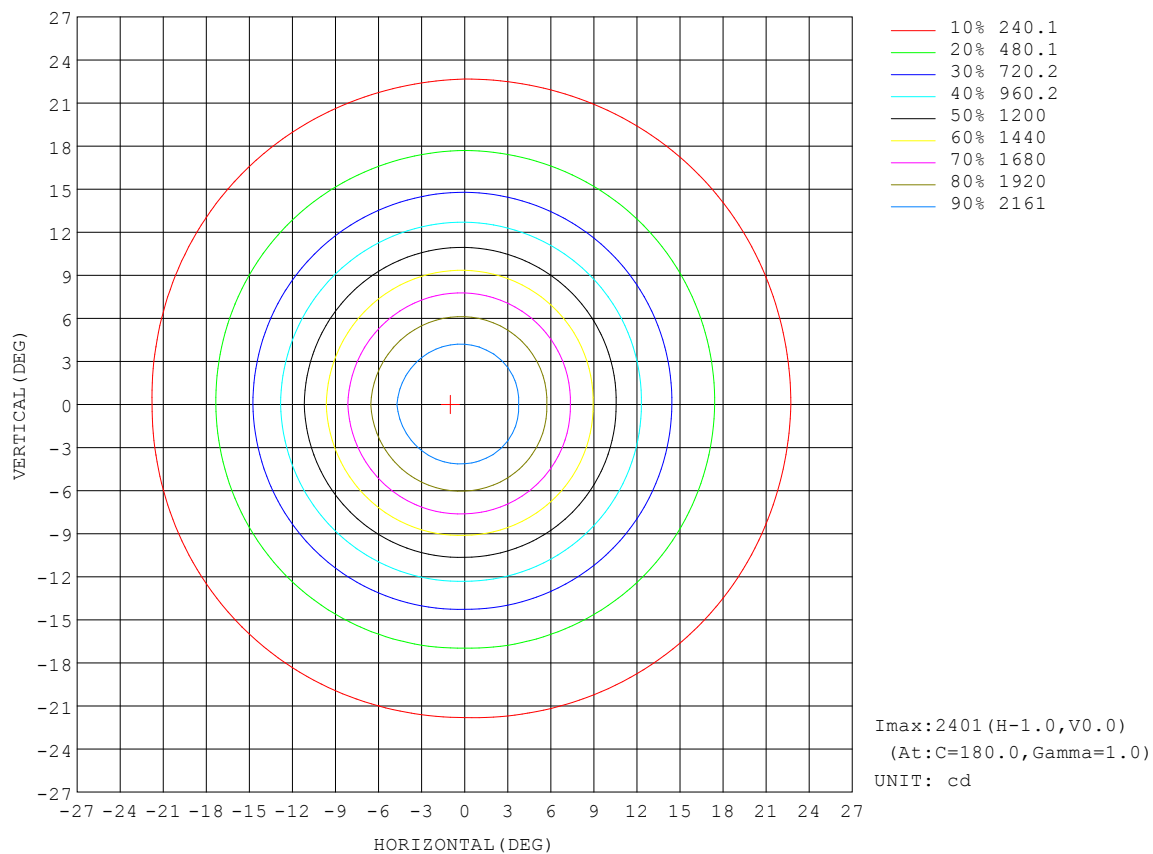


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

Flux out:197.7 lm

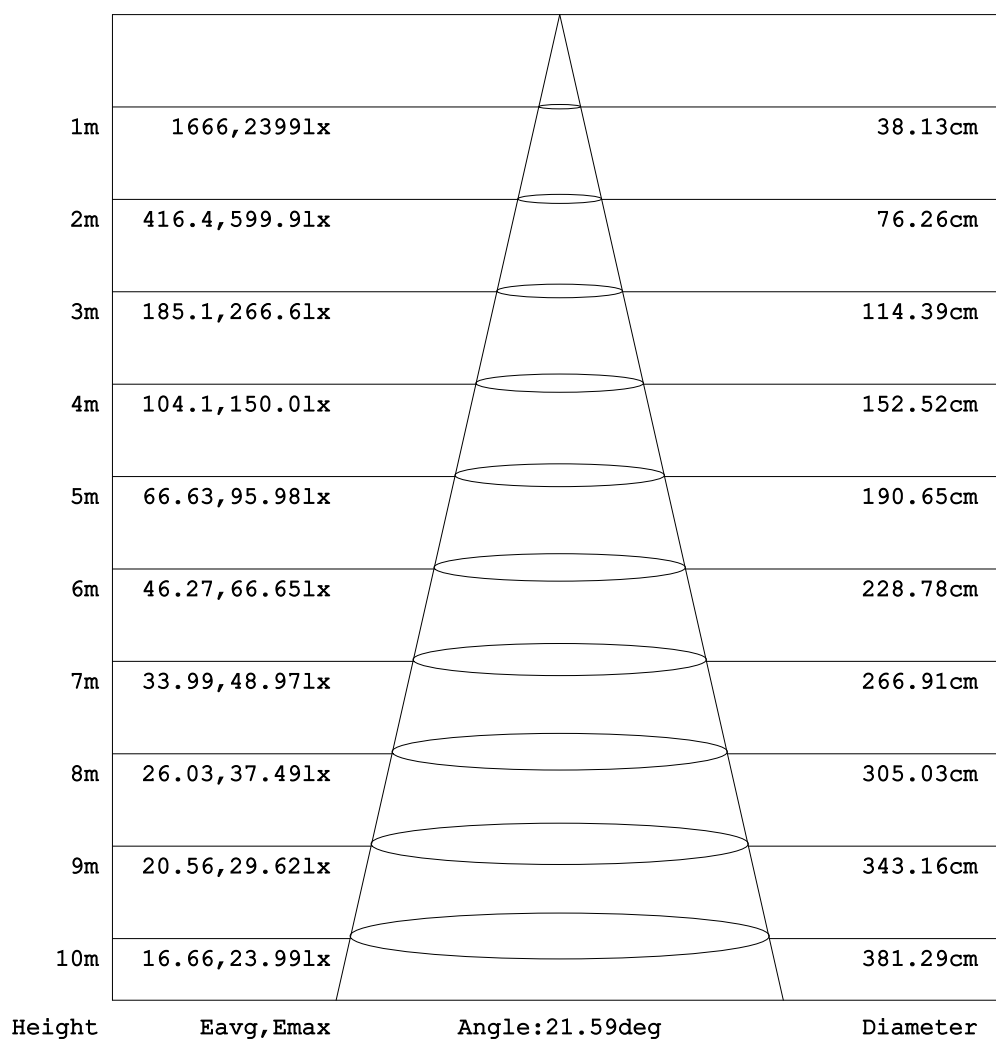


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

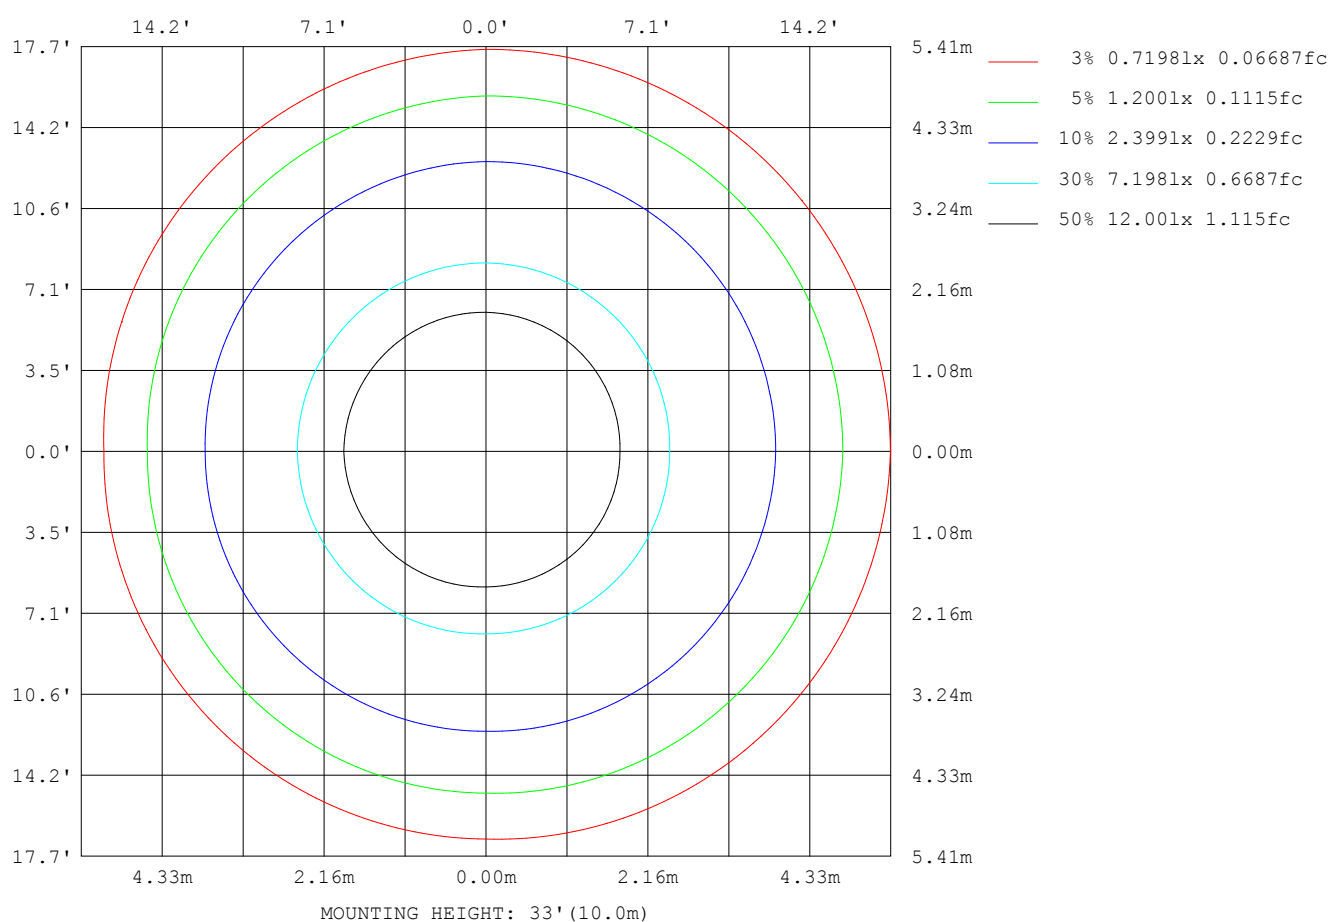

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1075
L_0~180 (75) av	129
L_0~180 (85) av	110
L_90~270 (65) av	1046
L_90~270 (75) av	148
L_90~270 (85) av	110
L_45 (65) av	1053
L_45 (75) av	136
L_45 (85) av	106

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2019-10-22

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

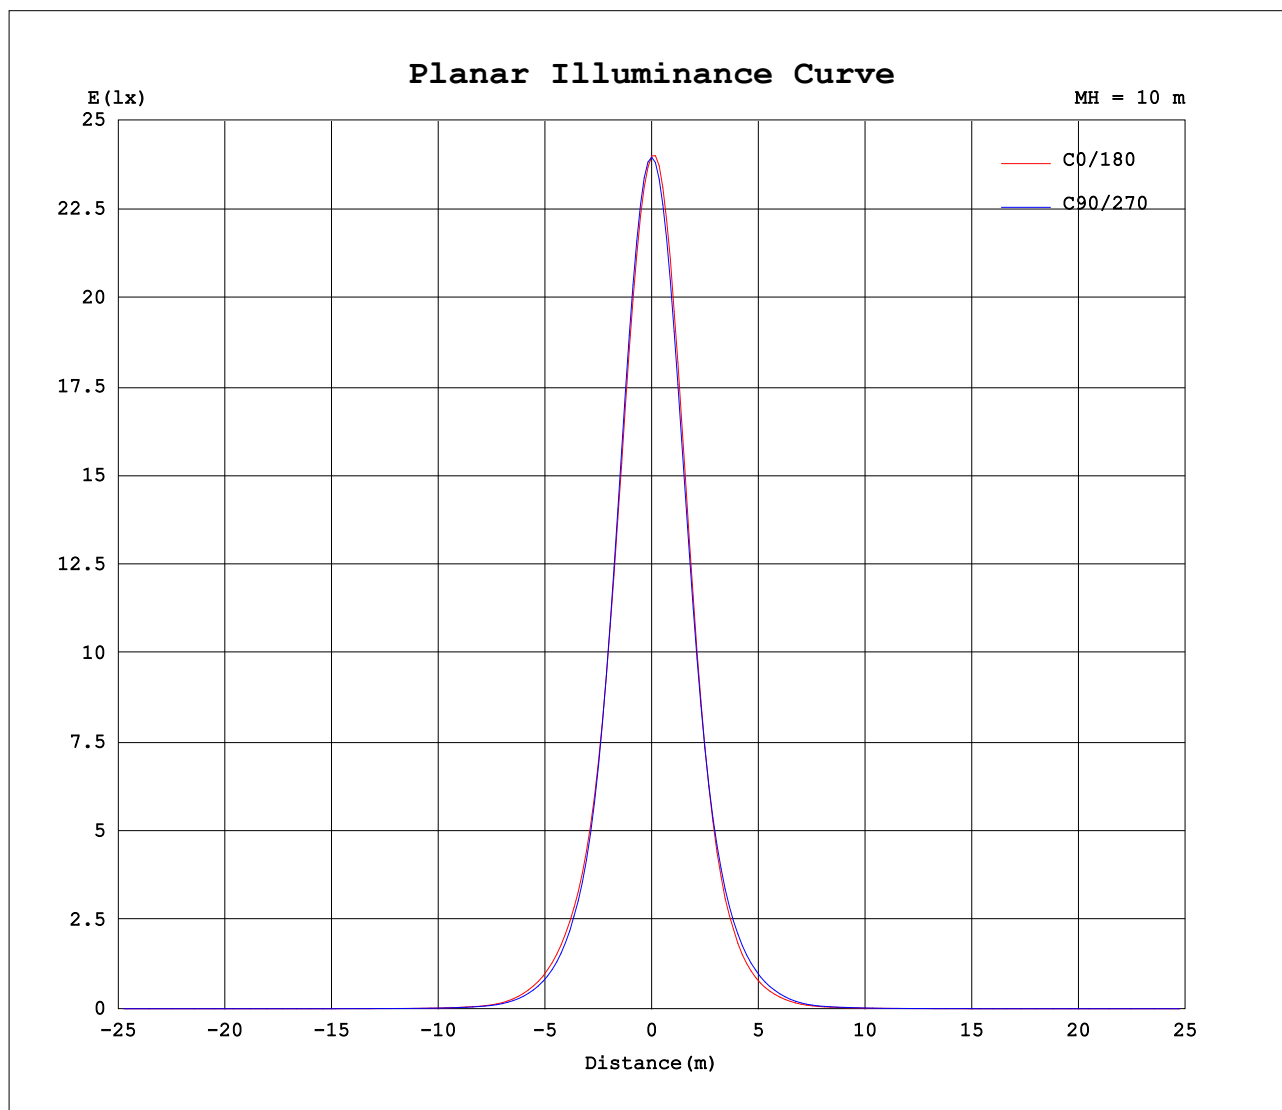

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Xie Bi
Test Date: 2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 6.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.0V I:0.0354A P:6.721W PF:0.8578 Freq:59.98Hz Lamp Flux:468.583x1 lm		
NAME: S3510LED	TYPE:	WEIGHT:
SPEC.:P-S3510LED-7W3024-CI15037R90-LDE700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0001	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	2399	2395	2399	2395															
5	2017	2059	2132	2069															
10	1277	1299	1381	1341															
15	663	644	692	697															
20	343	314	317	347															
25	174	148	142	172															
30	81.7	67.0	62.2	79.4															
35	31.3	26.0	23.3	29.9															
40	12.8	11.3	9.86	12.1															
45	5.67	5.13	4.85	5.94															
50	2.78	2.52	2.50	2.88															
55	1.57	1.35	1.35	1.61															
60	0.95	0.77	0.77	0.96															
65	0.48	0.37	0.42	0.51															
70	0.10	0.06	0.08	0.11															
75	0.05	0.02	0.01	0.06															
80	0.03	0.01	0.01	0.03															
85	0.01	0.00	0.00	0.02															
90	0.00	0.00	0.00	0.01															
95	0.00	0.00	0.01	0.00															
100	0.00	0.00	0.01	0.00															
105	0.00	0.00	0.01	0.00															
110	0.00	0.00	0.01	0.00															
115	0.00	0.01	0.01	0.00															
120	0.00	0.01	0.02	0.00															
125	0.00	0.02	0.03	0.01															
130	0.01	0.05	0.05	0.02															
135	0.06	0.12	0.07	0.02															
140	0.17	0.24	0.13	0.09															
145	0.38	0.46	0.23	0.17															
150	0.78	0.86	0.43	0.36															
155	1.37	1.43	0.76	0.70															
160	1.92	2.00	1.22	1.17															
165	2.28	2.35	1.68	1.61															
170	2.28	2.30	1.96	1.88															
175	2.10	2.09	1.99	1.93															
180	2.03	2.01	2.02	2.01															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2019-10-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.800m [K=1.0000]
 Remarks: