


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm					
NAME: S355LED		TYPE:		WEIGHT:	
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700		DIM.:		SERIAL No.:	
MFR.: CETTIGA		SUR.:0.0007		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 75.59 lm/W			
MODEL	CLU7A2 0402	I _{max} (cd)	1167	S/MH (C0/180)	0.51
NOMINAL POWER (W)	5	LOR (%)	100.0	S/MH (C90/270)	0.52
RATED VOLTAGE (V)	220.0	TOTAL FLUX (lm)	395.19	η UP, DN (C0-180)	0.2, 55.4
NOMINAL FLUX (lm)	395.189	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 44.3
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220.2	η down (%)	99.7	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

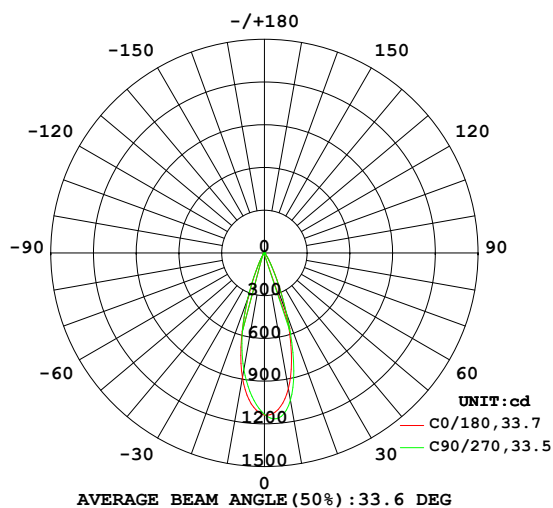

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

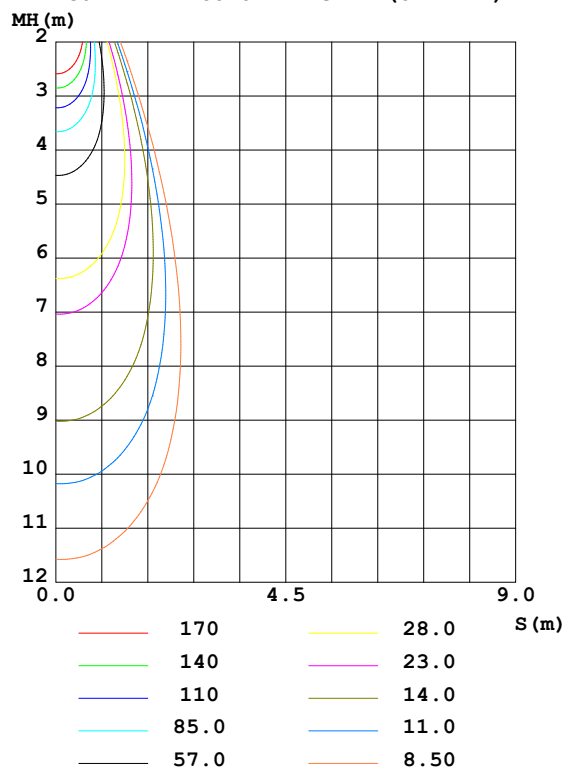

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Xie Bi
 Test Date: 2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 6.900m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	967.5	1051	889.3	831.7					0- 10	98.77	98.77	25,25
20	446.6	456.9	335.8	349.8					10- 20	184.5	283.2	71.7,71.7
30	83.49	82.26	55.49	55.15					20- 30	85.45	368.7	93.3,93.3
40	12.26	11.04	8.235	8.407					30- 40	19.64	388.3	98.3,98.3
50	2.944	2.667	2.296	2.304					40- 50	3.944	392.3	99.3,99.3
60	0.8540	0.7601	0.6961	0.6215					50- 60	1.317	393.6	99.6,99.6
70	0.0755	0.0116	0.0058	0.0522					60- 70	0.3105	393.9	99.7,99.7
80	0.0116	0	0.0058	0.0116					70- 80	0.0189	393.9	99.7,99.7
90	0.0115	0	0.0058	0.0058					80- 90	0.0062	393.9	99.7,99.7
100	0	0	0.0058	0.0058					90-100	0.0033	393.9	99.7,99.7
110	0	0.0058	0.0116	0.0058					100-110	0.0049	393.9	99.7,99.7
120	0	0.0116	0.0232	0.0058					110-120	0.0074	393.9	99.7,99.7
130	0.0058	0.0522	0.0465	0.0116					120-130	0.0149	393.9	99.7,99.7
140	0.1450	0.2207	0.1394	0.0986					130-140	0.0541	394.0	99.7,99.7
150	0.6494	0.7371	0.4703	0.4697					140-150	0.1965	394.2	99.7,99.7
160	1.393	1.486	1.120	1.114					150-160	0.4294	394.6	99.9,99.9
170	1.764	1.828	1.480	1.398					160-170	0.4009	395.0	100,100
180	1.840	1.840	1.811	1.805					170-180	0.1616	395.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.900m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:

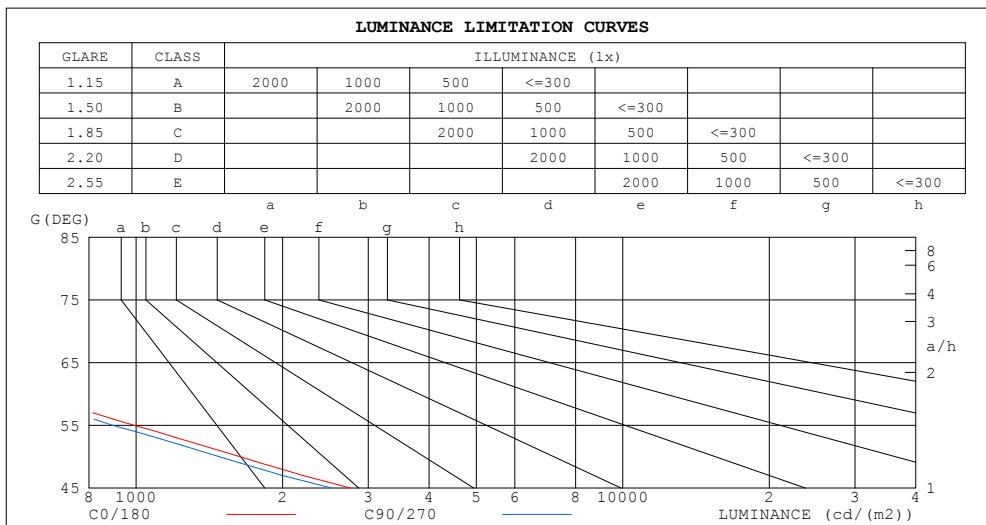

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	24	0
80	24	0
75	40	0
70	79	12
65	354	231
60	610	543
55	991	896
50	1636	1482
45	2760	2524


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.07	1.03	1.01	1.05	1.02	.00	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.01	.98	.94	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.93	.89	.96	.92	.89	.94	.90	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.88	.85	.92	.88	.85	.90	.87	.84	.89	.86	.83	.87	.85	.82	.81
6.0	.89	.85	.81	.88	.84	.81	.87	.83	.80	.86	.82	.80	.84	.82	.79	.78
7.0	.86	.81	.78	.85	.81	.78	.84	.80	.77	.83	.79	.77	.82	.79	.76	.75
8.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.77	.74	.79	.76	.74	.73
9.0	.80	.75	.72	.79	.75	.72	.78	.74	.72	.77	.74	.71	.77	.74	.71	.70
10.0	.77	.72	.70	.76	.72	.69	.76	.72	.69	.75	.72	.69	.74	.71	.69	.68

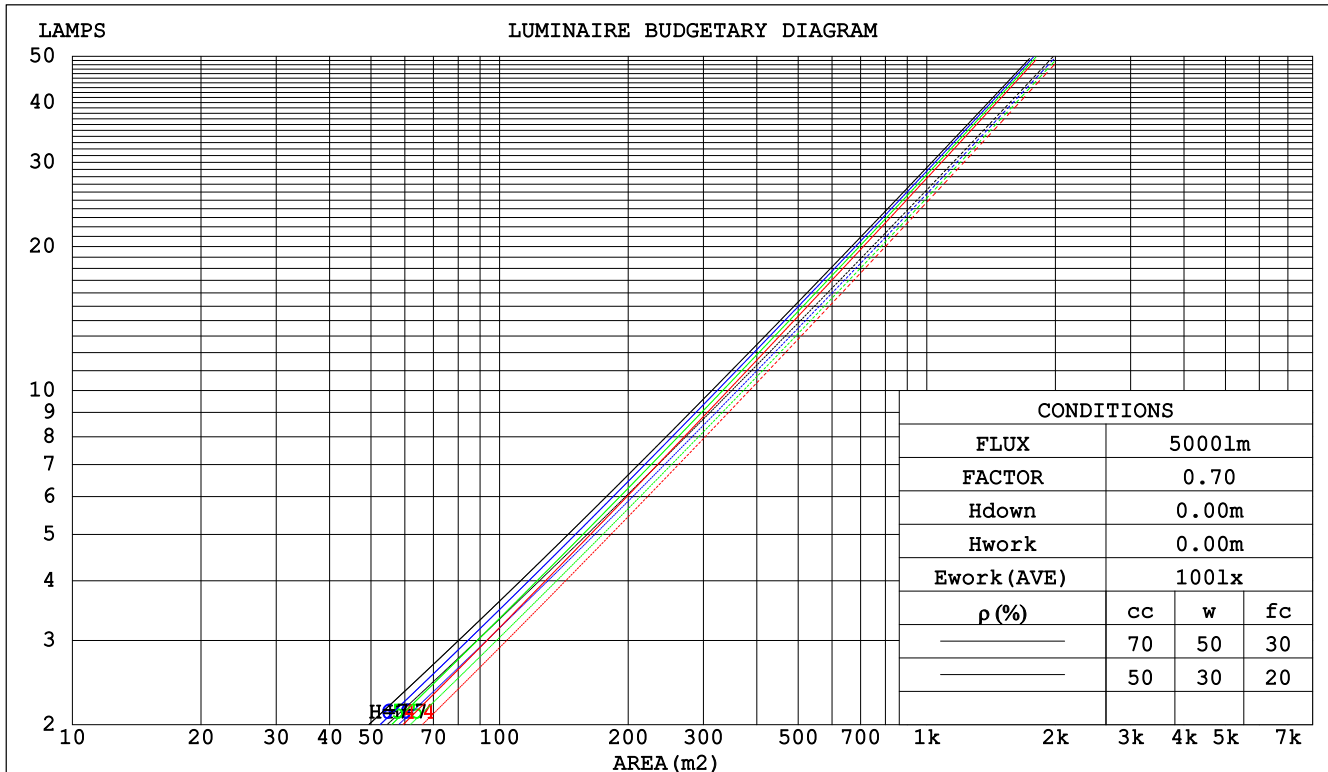

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.900m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients (WEC)										
0.0																	
1.0	.146	.083	.026	.139	.079	.025	.126	.072	.023	.115	.066	.021	.104	.060	.019		
2.0	.136	.075	.023	.131	.072	.022	.120	.067	.021	.110	.062	.019	.102	.057	.018		
3.0	.128	.068	.020	.123	.066	.020	.114	.062	.019	.106	.058	.018	.099	.055	.017		
4.0	.120	.063	.018	.116	.061	.018	.109	.058	.017	.102	.055	.017	.096	.052	.016		
5.0	.114	.058	.017	.111	.057	.017	.104	.054	.016	.098	.052	.015	.093	.050	.015		
6.0	.108	.054	.016	.105	.053	.015	.100	.051	.015	.095	.049	.014	.090	.047	.014		
7.0	.103	.051	.014	.101	.050	.014	.096	.048	.014	.091	.047	.014	.087	.045	.013		
8.0	.099	.048	.014	.097	.048	.013	.092	.046	.013	.088	.045	.013	.084	.043	.013		
9.0	.095	.046	.013	.093	.045	.013	.089	.044	.012	.085	.043	.012	.082	.042	.012		
10.0	.091	.044	.012	.089	.043	.012	.086	.042	.012	.082	.041	.012	.079	.040	.011		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.171	.160	.150	.147	.137	.129	.100	.095	.089	.058	.055	.052	.018	.018	.017	
2.0	.154	.135	.119	.132	.116	.103	.090	.080	.072	.052	.047	.042	.017	.015	.014	
3.0	.140	.116	.097	.120	.100	.084	.082	.069	.059	.047	.041	.035	.015	.013	.011	
4.0	.128	.101	.080	.110	.087	.070	.075	.061	.049	.044	.035	.029	.014	.012	.010	
5.0	.118	.088	.067	.101	.077	.058	.070	.053	.041	.040	.031	.024	.013	.010	.008	
6.0	.109	.079	.057	.094	.068	.049	.065	.048	.035	.038	.028	.021	.012	.009	.007	
7.0	.102	.071	.049	.088	.061	.043	.061	.043	.030	.035	.025	.018	.011	.008	.006	
8.0	.096	.064	.042	.082	.056	.037	.057	.039	.026	.033	.023	.016	.011	.008	.005	
9.0	.090	.059	.037	.078	.051	.032	.054	.036	.023	.031	.021	.014	.010	.007	.005	
10.0	.086	.054	.033	.074	.047	.029	.051	.033	.020	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-03-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm											
NAME: S355LED					TYPE:			WEIGHT:			
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700					DIM.:			SERIAL No.:			
MFR.: CETTIGA					SUR.:0.0007			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		12.0	12.7	12.2	12.9	13.0	11.9	12.7	12.2	12.8	13.0
	3H	11.8	12.5	12.1	12.7	12.9	11.8	12.5	12.0	12.6	12.8
	4H	11.8	12.4	12.0	12.6	12.8	11.7	12.3	12.0	12.6	12.8
	6H	11.7	12.3	12.0	12.5	12.7	11.6	12.2	11.9	12.5	12.7
	8H	11.6	12.2	11.9	12.5	12.7	11.6	12.1	11.9	12.4	12.7
	12H	11.6	12.1	11.9	12.4	12.7	11.5	12.1	11.8	12.3	12.6
4H	2H	11.8	12.4	12.0	12.6	12.8	11.7	12.4	12.0	12.6	12.8
	3H	11.6	12.2	11.9	12.4	12.7	11.6	12.1	11.9	12.4	12.6
	4H	11.5	12.0	11.8	12.3	12.6	11.5	12.0	11.8	12.3	12.6
	6H	11.4	11.8	11.8	12.2	12.5	11.4	11.8	11.7	12.1	12.5
	8H	11.3	11.8	11.7	12.1	12.5	11.3	11.7	11.7	12.1	12.4
	12H	11.3	11.7	11.7	12.0	12.4	11.2	11.6	11.7	12.0	12.4
8H	4H	11.3	11.8	11.7	12.1	12.5	11.3	11.7	11.7	12.1	12.4
	6H	11.2	11.6	11.7	12.0	12.4	11.2	11.5	11.6	11.9	12.3
	8H	11.2	11.5	11.6	11.9	12.3	11.1	11.4	11.6	11.8	12.3
	12H	11.1	11.4	11.6	11.8	12.3	11.1	11.3	11.5	11.8	12.2
12H	4H	11.3	11.7	11.7	12.0	12.4	11.2	11.6	11.7	12.0	12.4
	6H	11.2	11.5	11.6	11.9	12.3	11.1	11.4	11.6	11.8	12.3
	8H	11.1	11.4	11.6	11.8	12.3	11.1	11.3	11.5	11.8	12.2
Variations with the observer position at spacings:											
S = 1.0H	+ 4.1 / - 9.4					+ 4.0 / - 9.4					
1.5H	+ 6.2 / - 6.9					+ 6.2 / - 6.7					
2.0H	+ 5.0 / - 6.4					+ 4.8 / - 6.6					

CIE Pub.117, 395.2 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = -3.2$)

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	81	90	85	81	89	84	81	78
0.80	97	92	89	97	92	89	96	91	88	85
1.00	101	96	93	101	96	93	99	95	92	89
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	105	103	101	96
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	116	114	112	113	112	110	109	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.900m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:

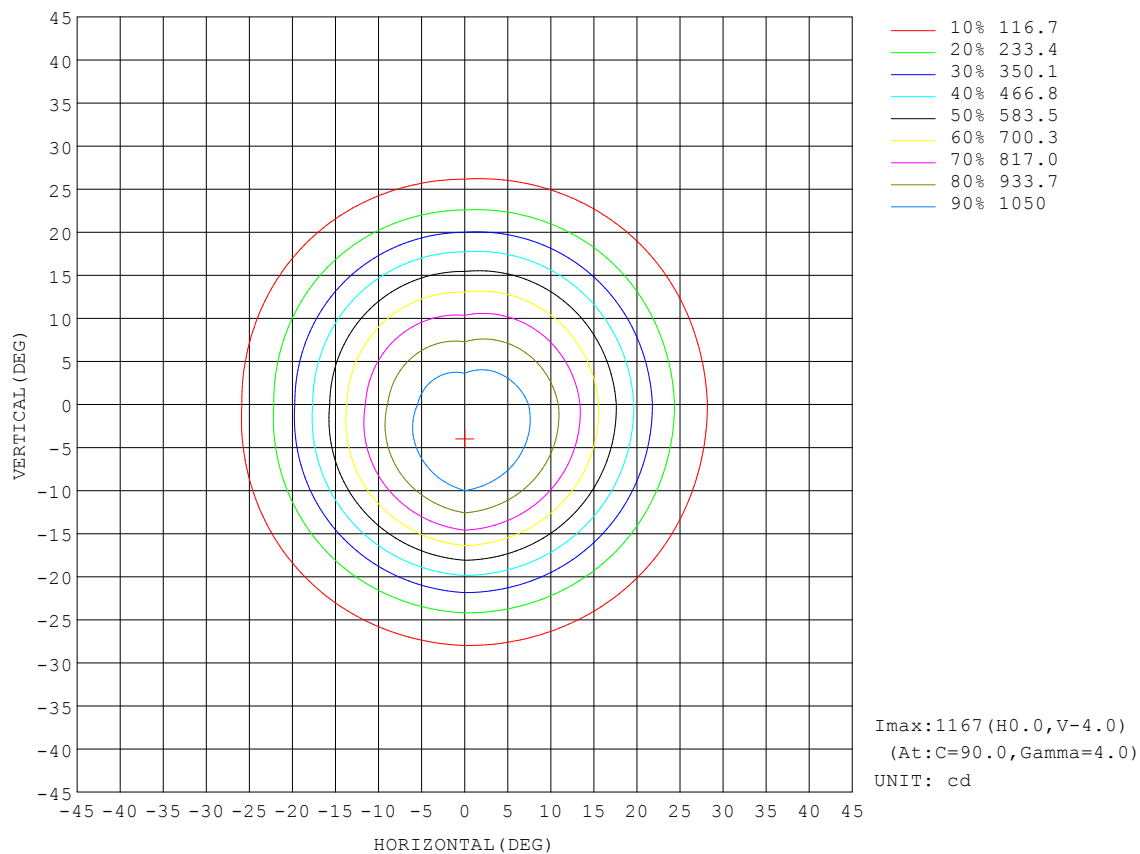


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:

Flux out:233.0 lm

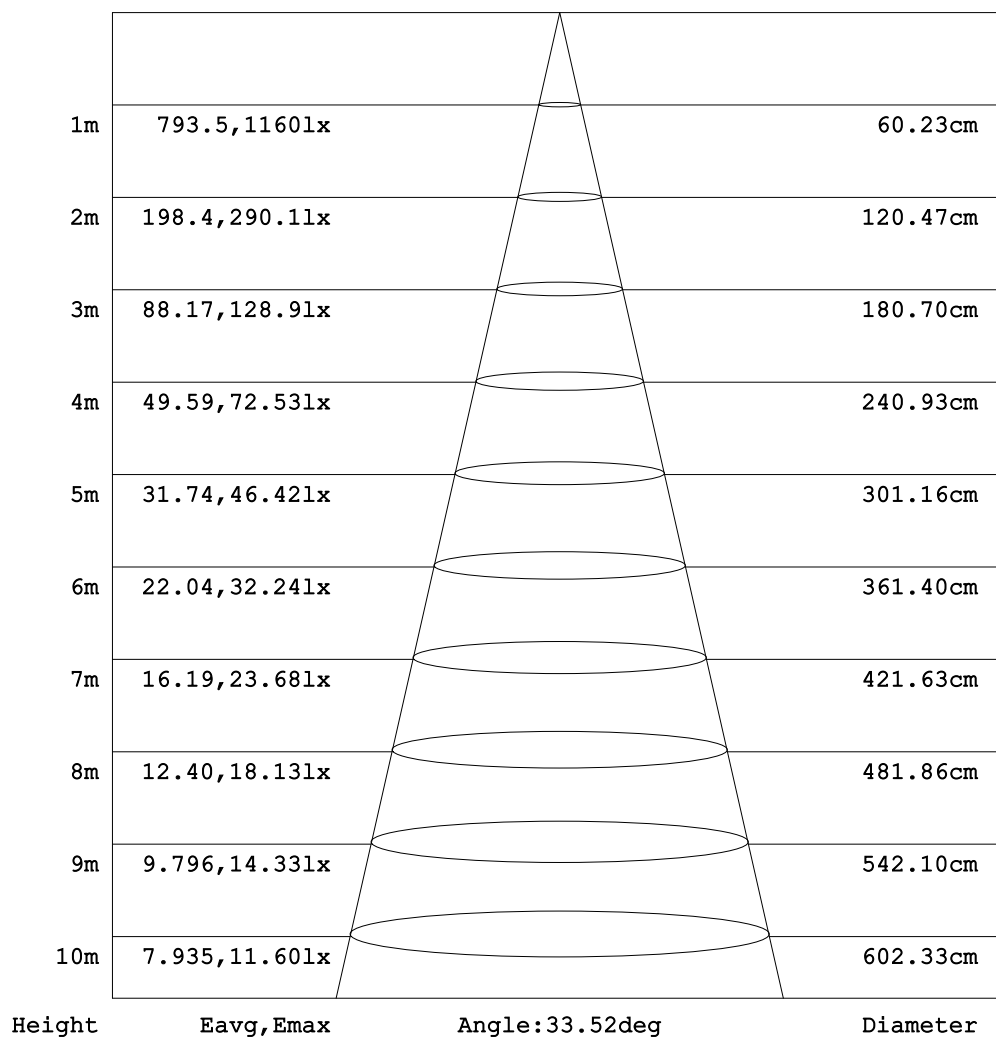


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.900m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:

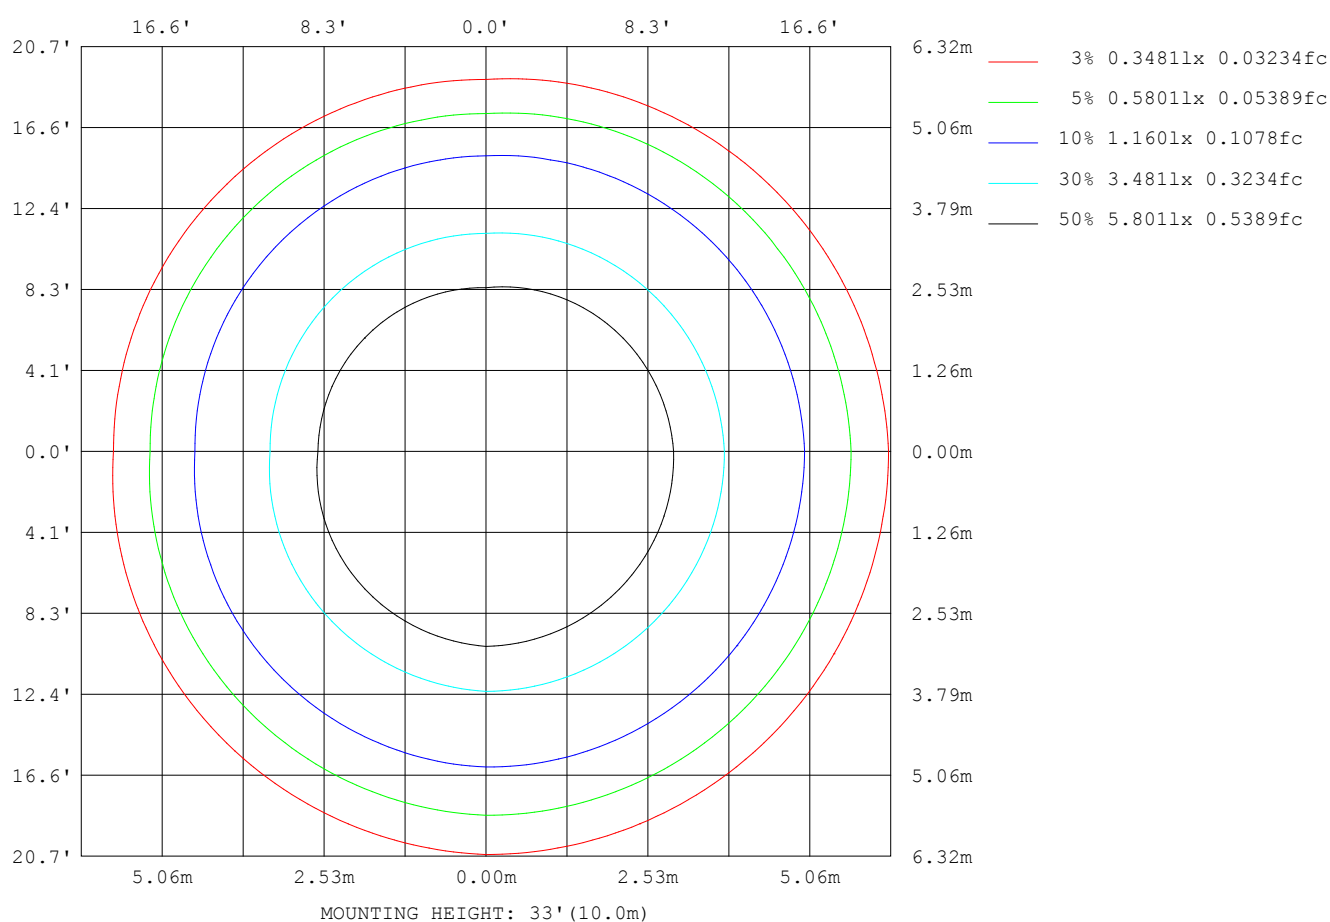

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	314
L_0~180 (75) av	24
L_0~180 (85) av	24
L_90~270 (65) av	238
L_90~270 (75) av	12
L_90~270 (85) av	24
L_45 (65) av	264
L_45 (75) av	16
L_45 (85) av	24

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:6.900m [K=1.0000]
 Remarks:

Planar Illuminance Curve

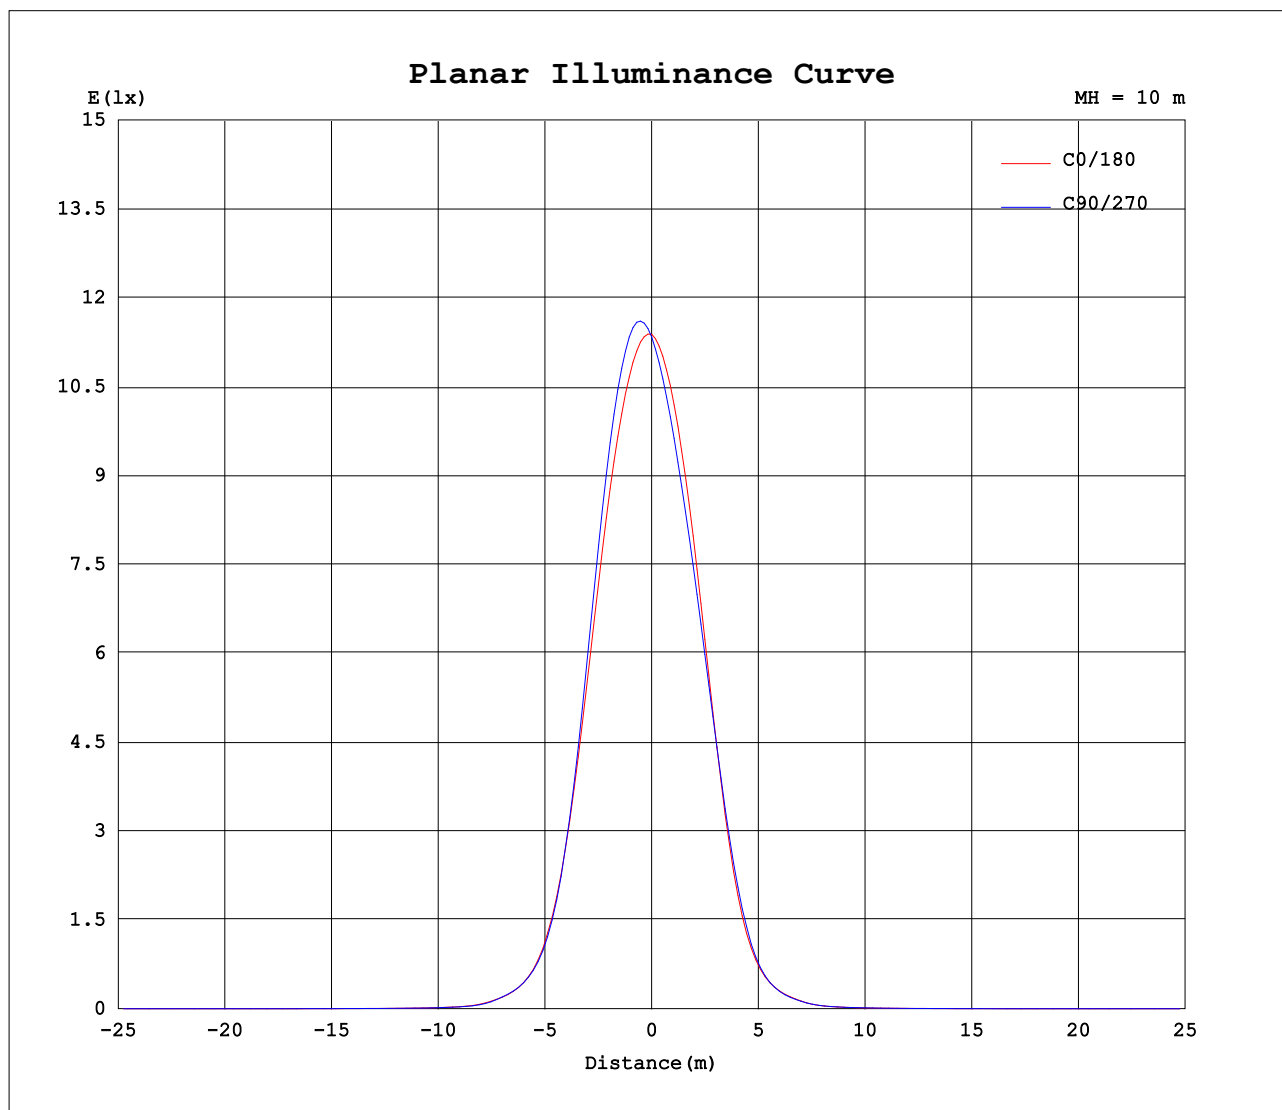

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Xie Bi
Test Date: 2020-03-21

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 6.900m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.0300A P:5.228W PF:0.7900 Freq:59.98Hz Lamp Flux:395.189x1 lm		
NAME: S355LED	TYPE:	WEIGHT:
SPEC.:P-S355LED-5W2733-CI35036R90-LDY700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:0.0007	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270															
0	1138	1134	1138	1134															
5	1104	1163	1064	1010															
10	967	1051	889	832															
15	732	792	624	606															
20	447	457	336	350															
25	208	201	138	147															
30	83.5	82.3	55.5	55.2															
35	35.8	36.2	23.6	22.9															
40	12.3	11.0	8.24	8.41															
45	5.46	5.00	4.05	4.24															
50	2.94	2.67	2.30	2.30															
55	1.59	1.44	1.32	1.24															
60	0.85	0.76	0.70	0.62															
65	0.42	0.27	0.32	0.29															
70	0.08	0.01	0.01	0.05															
75	0.03	0.00	0.01	0.02															
80	0.01	0.00	0.01	0.01															
85	0.01	0.00	0.01	0.01															
90	0.01	0.00	0.01	0.01															
95	0.00	0.00	0.01	0.01															
100	0.00	0.00	0.01	0.01															
105	0.00	0.01	0.01	0.01															
110	0.00	0.01	0.01	0.01															
115	0.00	0.02	0.01	0.01															
120	0.00	0.01	0.02	0.01															
125	0.00	0.03	0.03	0.01															
130	0.01	0.05	0.05	0.01															
135	0.05	0.10	0.08	0.02															
140	0.14	0.22	0.14	0.10															
145	0.34	0.40	0.26	0.20															
150	0.65	0.74	0.47	0.47															
155	1.11	1.14	0.78	0.81															
160	1.39	1.49	1.12	1.11															
165	1.59	1.64	1.28	1.21															
170	1.76	1.83	1.48	1.40															
175	1.82	1.87	1.68	1.58															
180	1.84	1.84	1.81	1.80															

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Xie Bi
Test Date:2020-03-21

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:6.900m [K=1.0000]
Remarks: