
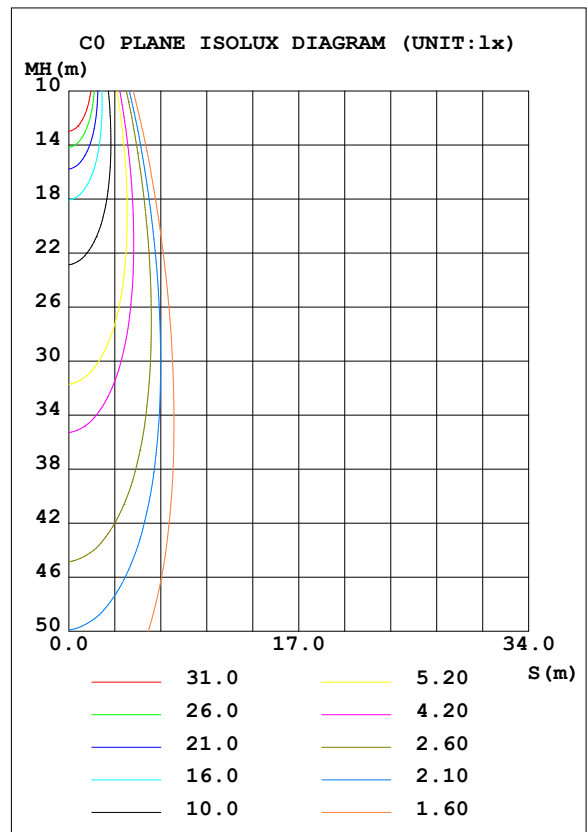


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 69.92 lm/W			
MODEL	CLU701 1002	I _{max} (cd)	5274	S/MH (C0/180)	0.41
NOMINAL POWER (W)	15W	LOR (%)	100.0	S/MH (C90/270)	0.35
RATED VOLTAGE (V)		TOTAL FLUX (lm)	1033.9	η UP, DN (C0-180)	0.2, 51.4
NOMINAL FLUX (lm)	1033.95	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 48.3
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	220.2	η down (%)	99.7	CIBSE SHR MAX	1.00

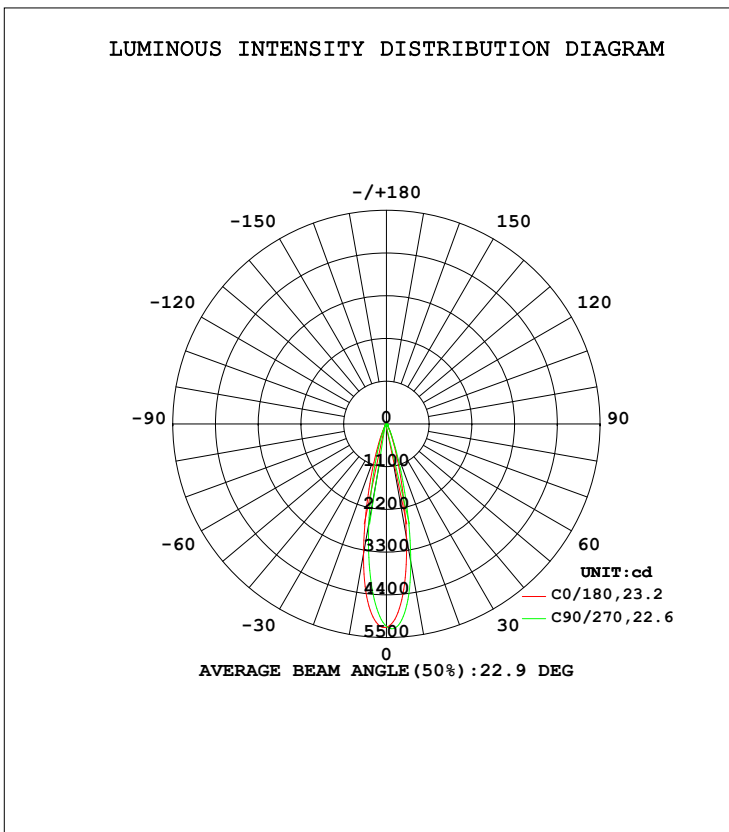

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Xie Bi
 Test Date: 2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 6.810m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270				γ	Φ zone	Φ total	%lum, lamp
10	2959	3612	3395	2621				0- 10	394.8	394.8	38.2,38.2
20	575.2	719.2	723.9	507.3				10- 20	434.8	829.6	80.2,80.2
30	104.7	120.8	128.5	99.70				20- 30	129.1	958.7	92.7,92.7
40	38.98	41.69	43.72	38.16				30- 40	40.77	999.5	96.7,96.7
50	17.79	20.30	19.79	16.62				40- 50	21.97	1021	98.8,98.8
60	3.492	1.396	3.167	1.692				50- 60	8.361	1030	99.6,99.6
70	0.0524	0.0087	0.0691	0.0192				60- 70	0.5833	1030	99.7,99.7
80	0	0	0	0.0035				70- 80	0.0058	1030	99.7,99.7
90	0	0	0	0				80- 90	0.0002	1030	99.7,99.7
100	0	0	0	0				90-100	0.0070	1030	99.7,99.7
110	0.2663	0	0.1885	0.0382				100-110	0.0319	1030	99.7,99.7
120	0.0174	0.0349	0.0262	0.0593				110-120	0.1078	1031	99.7,99.7
130	0.0871	0.1116	0.0698	0.1185				120-130	0.0537	1031	99.7,99.7
140	0.4130	0.3613	0.1816	0.2737				130-140	0.1349	1031	99.7,99.7
150	1.878	1.434	0.7607	0.9462				140-150	0.4092	1031	99.7,99.7
160	4.560	4.133	2.646	3.160				150-160	1.070	1032	99.8,99.8
170	5.171	5.360	4.294	4.377				160-170	1.236	1033	100,100
180	4.651	4.720	4.658	4.715				170-180	0.4520	1034	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

Conical surface Flux(90deg): 1012.1 lm

%lum = 97.9%
 %lamp = 97.9%

Conical surface Flux(120deg): 1029.9 lm


%lum = 99.6%
 %lamp = 99.6%

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:

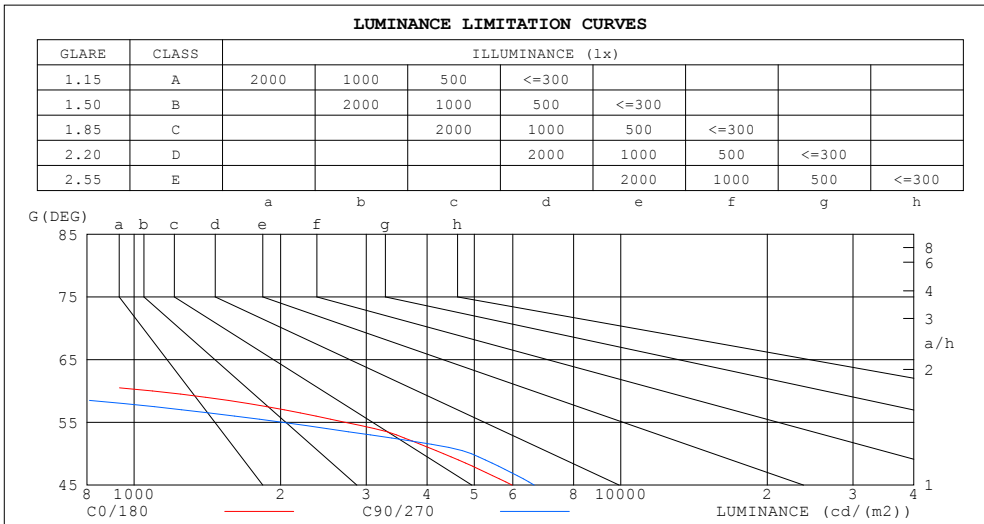

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	24	4
65	154	78
60	1091	436
55	2715	2020
50	4325	4935
45	5978	6639


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0														
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00														
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96														
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	.00	.98	.97	.97	.96	.95	.93														
3.0	1.03	.99	.96	1.02	.98	.96	.99	.96	.94	.97	.95	.93	.95	.93	.91	.90														
4.0	.99	.95	.92	.98	.94	.91	.96	.93	.90	.94	.91	.89	.92	.90	.88	.87														
5.0	.95	.91	.88	.94	.91	.88	.93	.90	.87	.91	.88	.86	.90	.87	.86	.84														
6.0	.92	.88	.85	.91	.87	.85	.90	.87	.84	.89	.86	.84	.88	.85	.83	.82														
7.0	.89	.85	.82	.89	.85	.82	.87	.84	.81	.86	.83	.81	.85	.83	.81	.80														
8.0	.87	.82	.80	.86	.82	.79	.85	.82	.79	.84	.81	.79	.83	.81	.79	.78														
9.0	.84	.80	.77	.84	.80	.77	.83	.79	.77	.82	.79	.77	.81	.79	.76	.76														
10.0	.82	.78	.75	.81	.78	.75	.81	.77	.75	.80	.77	.75	.79	.77	.75	.74														

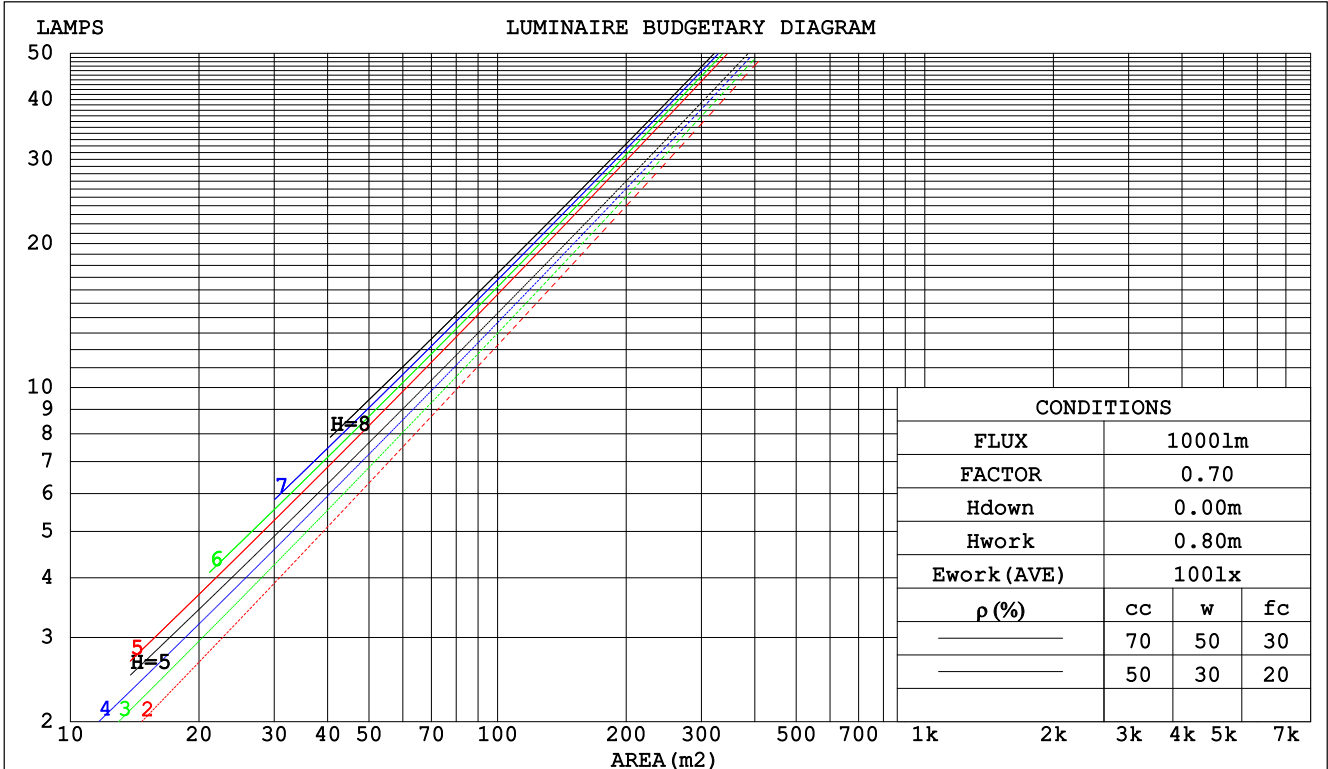

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.137	.078	.025	.130	.074	.024	.117	.067	.021	.106	.061	.020	.095	.055	.018	
2.0	.127	.070	.021	.121	.067	.021	.111	.062	.019	.101	.057	.018	.093	.052	.016	
3.0	.118	.063	.019	.114	.061	.018	.105	.057	.017	.097	.053	.016	.090	.050	.015	
4.0	.111	.058	.017	.107	.056	.017	.100	.053	.016	.093	.050	.015	.086	.047	.014	
5.0	.104	.053	.015	.101	.052	.015	.095	.049	.015	.089	.047	.014	.083	.045	.013	
6.0	.099	.049	.014	.096	.048	.014	.090	.046	.013	.085	.044	.013	.081	.042	.013	
7.0	.094	.046	.013	.091	.045	.013	.086	.044	.013	.082	.042	.012	.078	.040	.012	
8.0	.089	.044	.012	.087	.043	.012	.083	.041	.012	.079	.040	.012	.075	.039	.011	
9.0	.085	.041	.011	.083	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	
10.0	.081	.039	.011	.080	.038	.011	.076	.037	.011	.073	.036	.010	.070	.035	.010	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.171	.160	.151	.146	.138	.130	.100	.095	.090	.058	.055	.052	.018	.018	.017	
2.0	.153	.135	.121	.131	.116	.104	.090	.081	.073	.052	.047	.043	.017	.015	.014	
3.0	.138	.116	.098	.118	.100	.085	.081	.069	.060	.047	.041	.035	.015	.013	.012	
4.0	.125	.101	.082	.108	.087	.071	.074	.061	.050	.043	.035	.030	.014	.012	.010	
5.0	.115	.088	.069	.099	.076	.060	.068	.053	.042	.039	.031	.025	.013	.010	.008	
6.0	.106	.078	.058	.091	.068	.051	.063	.047	.036	.036	.028	.021	.012	.009	.007	
7.0	.098	.070	.050	.085	.061	.044	.058	.043	.031	.034	.025	.018	.011	.008	.006	
8.0	.092	.063	.044	.079	.055	.038	.055	.039	.027	.032	.023	.016	.010	.007	.005	
9.0	.086	.058	.038	.074	.050	.033	.051	.035	.024	.030	.021	.014	.010	.007	.005	
10.0	.081	.053	.034	.070	.046	.030	.049	.032	.021	.028	.019	.013	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm										
NAME: 29014LED					TYPE:			WEIGHT:		
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700					DIM.:			SERIAL No.:		
MFR.: CETTIGA					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.6	9.3	8.9	9.4	9.6	8.8	9.5	9.0	9.6	9.8
3H	8.5	9.1	8.7	9.3	9.5	8.7	9.3	8.9	9.4	9.6
4H	8.4	9.0	8.7	9.2	9.4	8.6	9.2	8.8	9.4	9.6
6H	8.3	8.9	8.6	9.1	9.4	8.5	9.0	8.8	9.3	9.5
8H	8.3	8.8	8.6	9.1	9.3	8.4	9.0	8.7	9.2	9.5
12H	8.2	8.7	8.6	9.0	9.3	8.4	8.9	8.7	9.2	9.4
4H 2H	8.5	9.0	8.7	9.3	9.5	8.6	9.2	8.9	9.4	9.6
3H	8.3	8.8	8.6	9.1	9.3	8.5	9.0	8.8	9.2	9.5
4H	8.2	8.7	8.5	9.0	9.3	8.4	8.8	8.7	9.1	9.4
6H	8.1	8.5	8.5	8.8	9.2	8.3	8.7	8.6	9.0	9.3
8H	8.0	8.4	8.4	8.8	9.1	8.2	8.6	8.6	8.9	9.3
12H	8.0	8.3	8.4	8.7	9.1	8.1	8.5	8.6	8.9	9.3
8H 4H	8.0	8.4	8.4	8.8	9.1	8.2	8.6	8.6	8.9	9.3
6H	7.9	8.2	8.4	8.6	9.1	8.1	8.4	8.5	8.8	9.2
8H	7.9	8.1	8.3	8.6	9.0	8.0	8.3	8.5	8.7	9.2
12H	7.8	8.0	8.3	8.5	9.0	8.0	8.2	8.4	8.7	9.1
12H 4H	8.0	8.3	8.4	8.7	9.1	8.1	8.5	8.6	8.9	9.3
6H	7.9	8.1	8.3	8.6	9.0	8.0	8.3	8.5	8.7	9.2
8H	7.8	8.0	8.3	8.5	9.0	8.0	8.2	8.4	8.7	9.1
Variations with the observer position at spacings:										
S = 1.0H	+ 2.1 / - 5.3					+ 2.3 / - 8.0				
1.5H	+ 2.0 / - 3.6					+ 2.1 / - 4.6				
2.0H	+ 4.3 / -17.5					+ 4.9 / -18.9				

CIE Pub.117, 1034 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.1)
 Area: 0.0064 m2

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	80	89	83	80	88	83	80	76
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	95	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	101	98	95	91
1.50	107	103	99	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHR NOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:

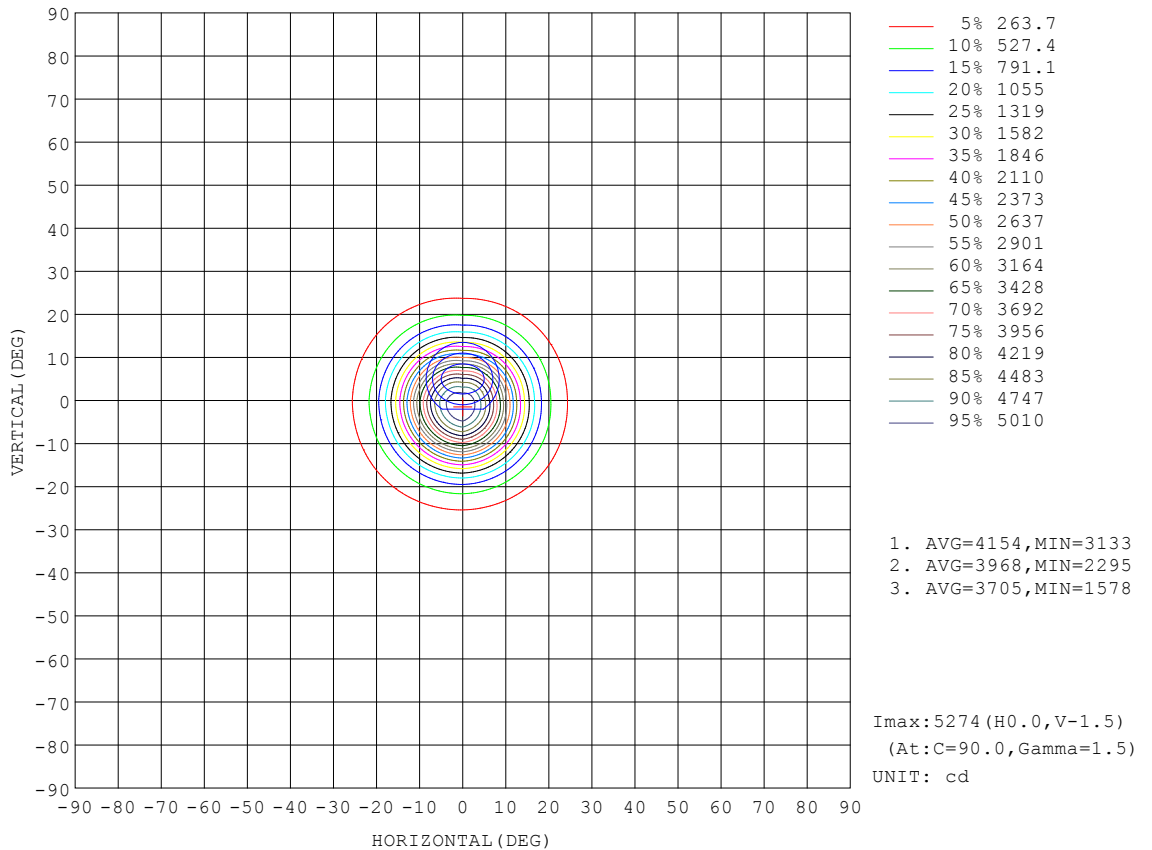


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

AAI Figure

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:

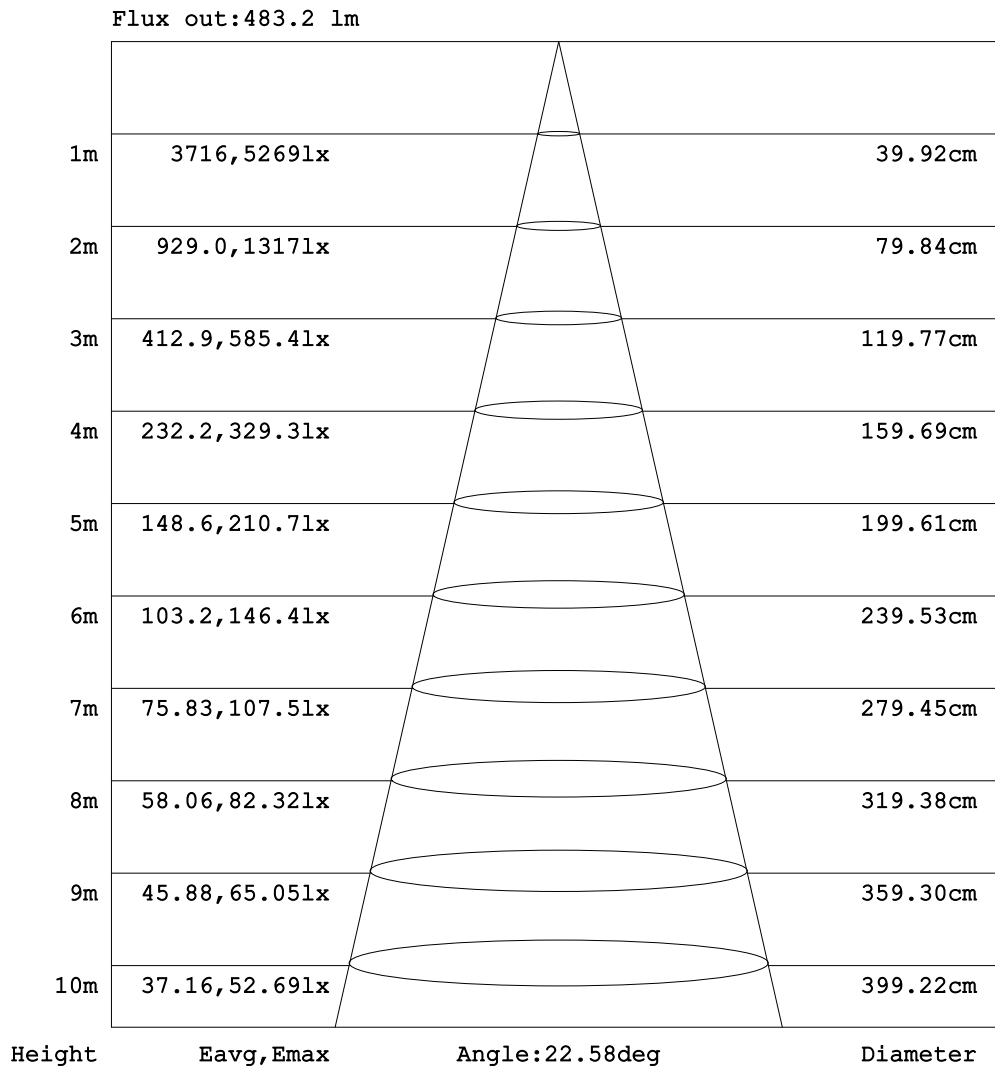


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:

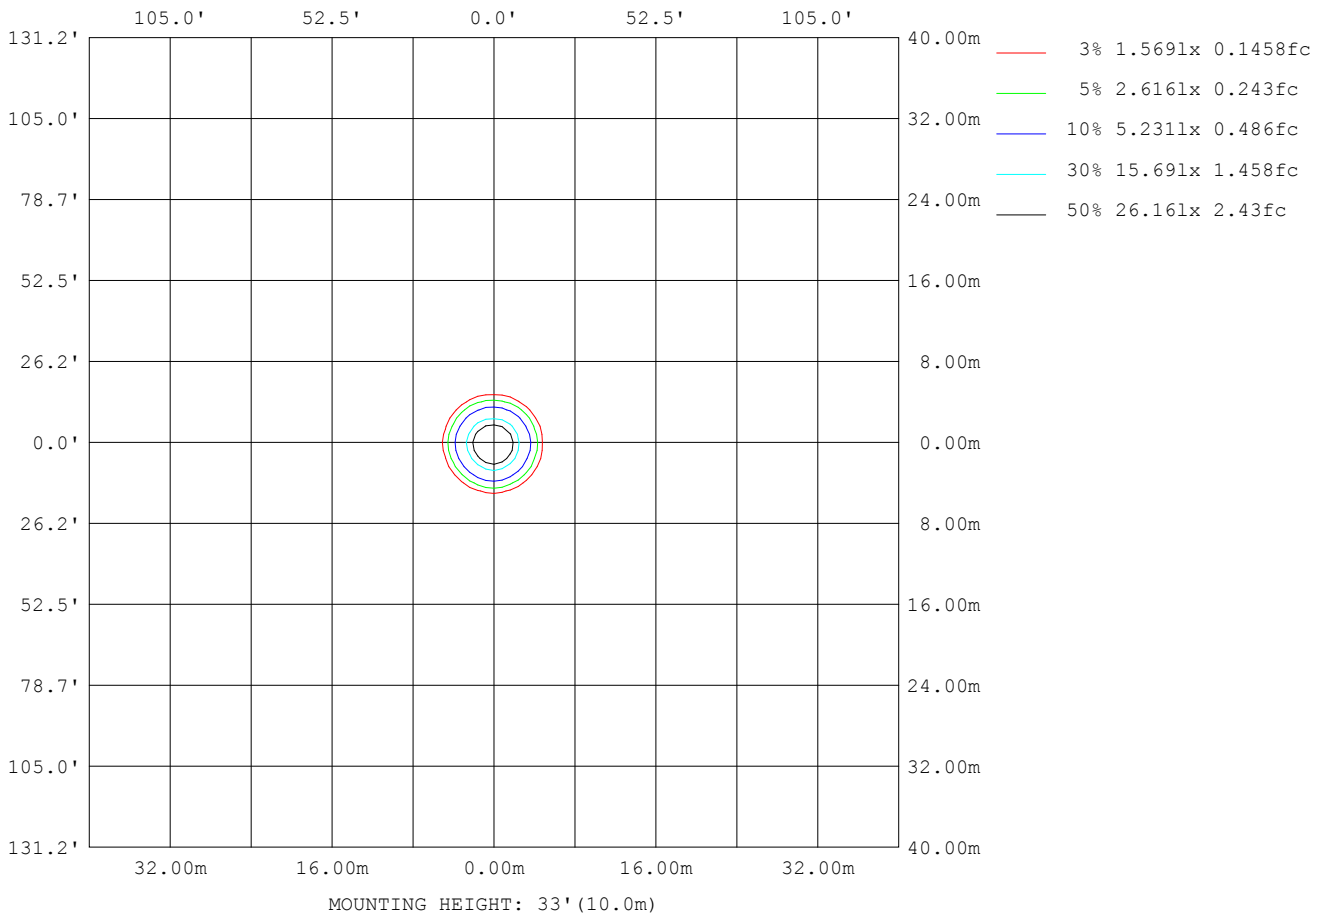

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	157
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	88
L_90~270 (75) av	4
L_90~270 (85) av	2
L_45 (65) av	114
L_45 (75) av	2
L_45 (85) av	1

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

Planar Illuminance Curve

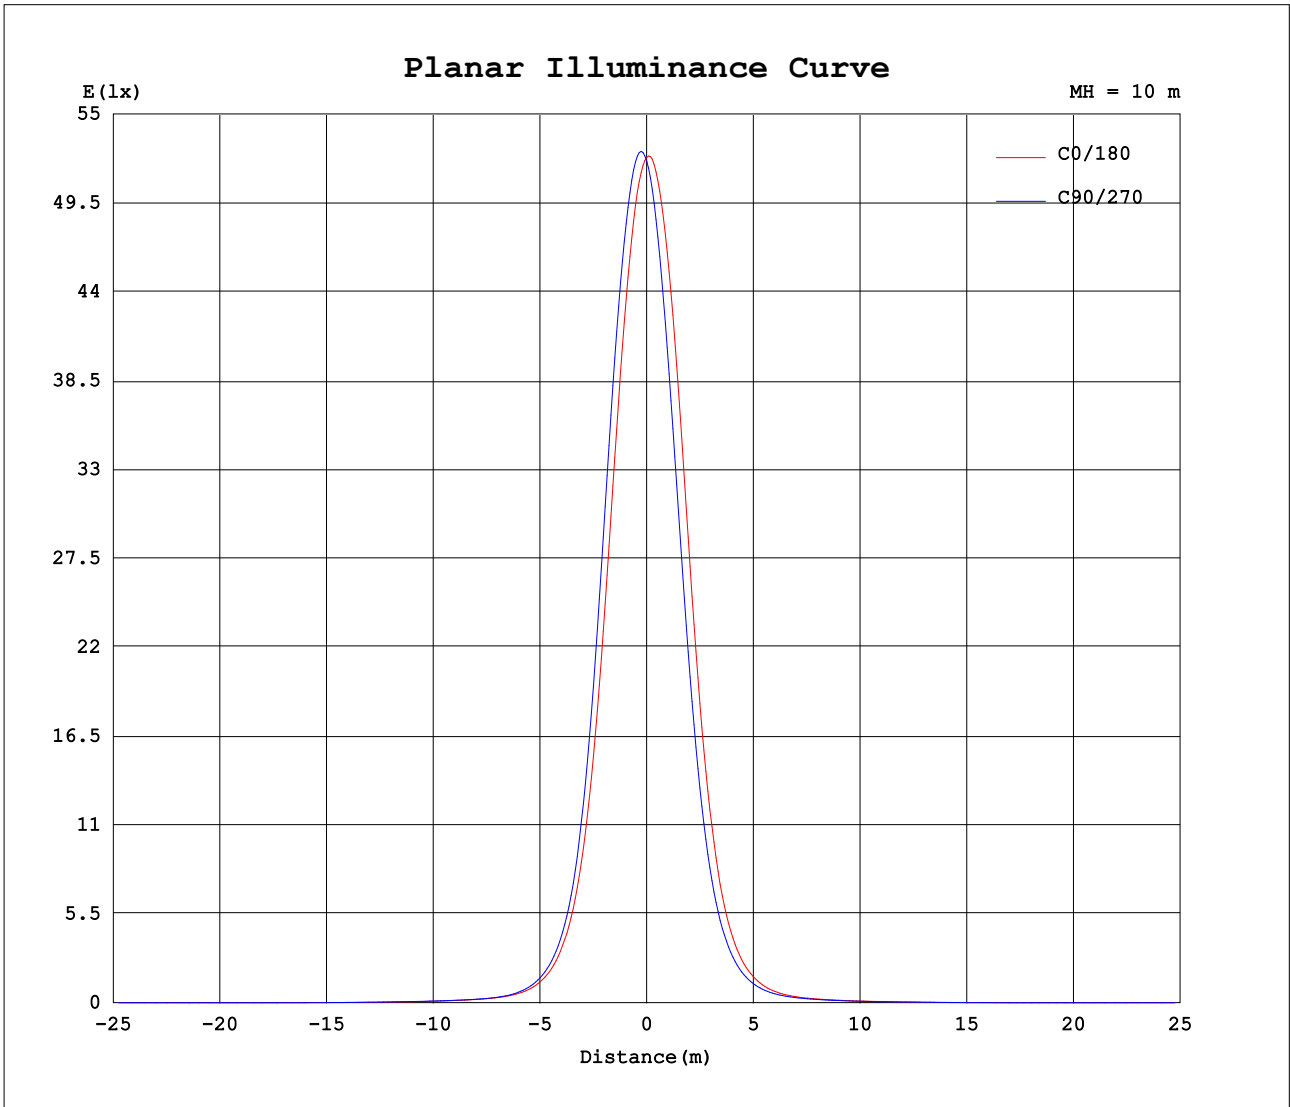

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:232.34V I:0.1217A P:14.787W PF:0.5230 Freq:50.00Hz Lamp Flux:1033.95x1 lm		
NAME: 29014LED	TYPE:	WEIGHT:
SPEC.:P-29014LED-15W3024-CI40031R90-HEK700	DIM.:	SERIAL No.:
MFR.: CETTIGA	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270																
0	5231	5208	5231	5208																
5	4541	4977	4809	4255																
10	2959	3612	3395	2621																
15	1418	1829	1735	1230																
20	575	719	724	507																
25	234	284	293	212																
30	105	121	129	99.7																
35	58.1	61.8	67.3	57.1																
40	39.0	41.7	43.7	38.2																
45	27.1	30.0	30.1	25.8																
50	17.8	20.3	19.8	16.6																
55	9.97	7.41	9.81	7.71																
60	3.49	1.40	3.17	1.69																
65	0.42	0.21	0.43	0.27																
70	0.05	0.01	0.07	0.02																
75	0.00	0.00	0.00	0.01																
80	0.00	0.00	0.00	0.00																
85	0.00	0.00	0.00	0.00																
90	0.00	0.00	0.00	0.00																
95	0.00	0.00	0.00	0.04																
100	0.00	0.00	0.00	0.00																
105	0.00	0.00	0.00	0.00																
110	0.27	0.00	0.19	0.04																
115	0.32	0.01	0.27	0.05																
120	0.02	0.03	0.03	0.06																
125	0.04	0.06	0.04	0.08																
130	0.09	0.11	0.07	0.12																
135	0.18	0.20	0.11	0.17																
140	0.41	0.36	0.18	0.27																
145	0.92	0.74	0.36	0.46																
150	1.88	1.43	0.76	0.95																
155	3.25	2.72	1.55	1.98																
160	4.56	4.13	2.65	3.16																
165	5.22	5.11	3.68	4.02																
170	5.17	5.36	4.29	4.38																
175	4.80	5.00	4.50	4.39																
180	4.65	4.72	4.66	4.72																

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Xie Bi
 Test Date:2024-01-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:6.810m [K=1.0000]
 Remarks: