


# CETTIG ÷

Recessed Mounted Pendant  
Series Downlight

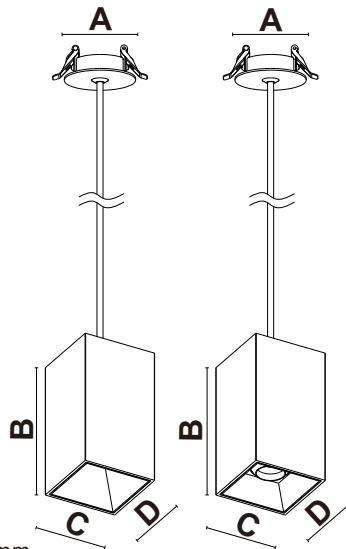

Suitable for Ceiling thickness 5-20mm.

| Model    | Power           | Products Size                                              | Cut out             |
|----------|-----------------|------------------------------------------------------------|---------------------|
| 2905LED  | 8W/10W/12W/15W  | A $\phi 80 \times B 115 \times C 90 \times D 90 \text{mm}$ | $\phi 64 \text{mm}$ |
| 29015LED | 10W/12W/15W/20W | A $\phi 80 \times B 150 \times C 90 \times D 90 \text{mm}$ | $\phi 64 \text{mm}$ |
| 2902LED  | 20W/25W/30W     | A $\phi 80 \times B 185 \times C 90 \times D 90 \text{mm}$ | $\phi 64 \text{mm}$ |
| 29014LED | 8W/10W/12W/15W  | A $\phi 80 \times B 150 \times C 90 \times D 90 \text{mm}$ | $\phi 64 \text{mm}$ |



To secure safety, a qualified electrician is required to install/remove the luminaire, in according with IEEE regulation and installation instructions.




CAUTION: Electric Shock.....




Don't stare at the operating light source.....



CAUTION: the luminaire must not be disposed of with household waste.....




Luminaire not suitable for covering with thermally insulating material.



Luminaire can't recessed mounted into flammable material.

## Installation:

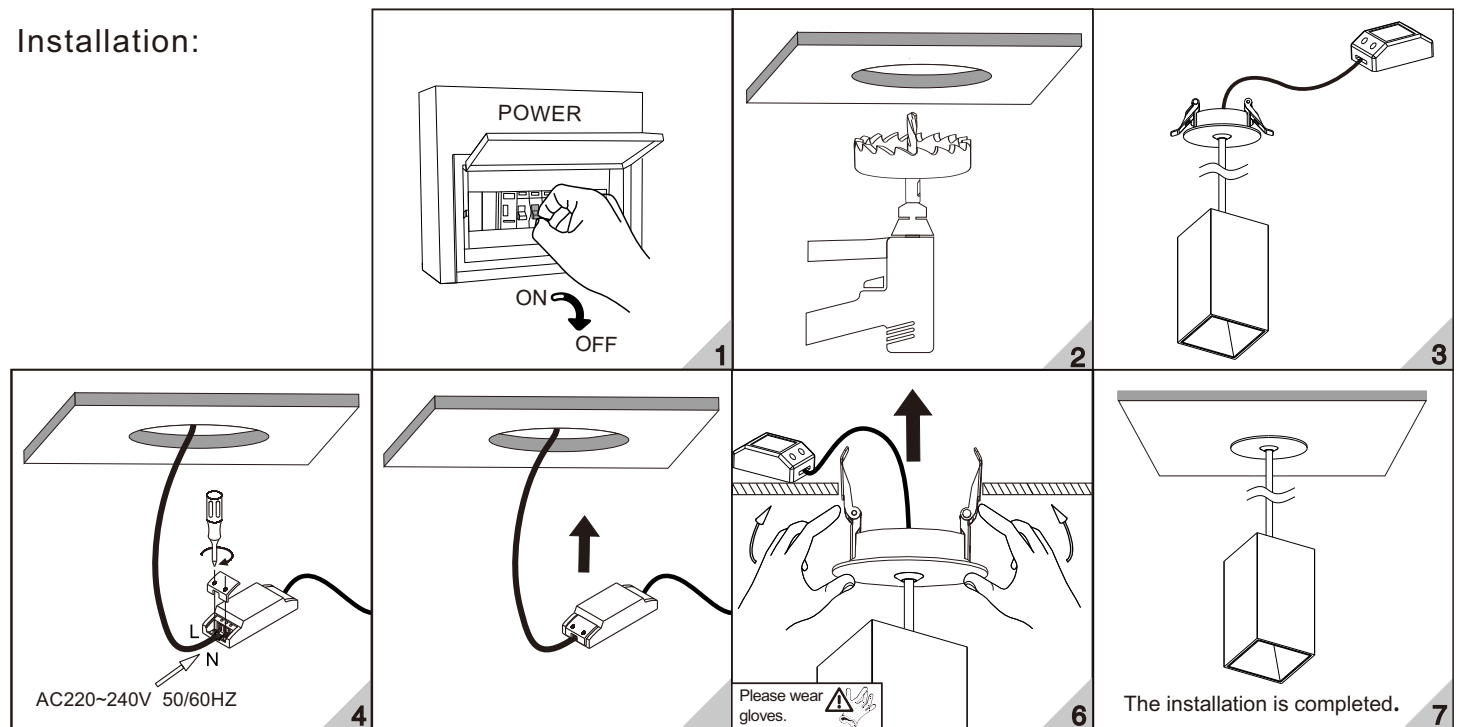

## Maintenance:

Pull out the fixture down from the ceiling.

